



Electrical Specification

Parameter	Specification	Unit
Center Frequency	1227.6	MHz
Bandwidth (BW)	$F_0 \pm 10 [1217.6 \sim 1237.6]$	MHz
Insertion Loss in BW	1.5 max.	dB
Ripple in BW	0.5 max.	dB
Return Loss in BW	10 min.	dB
Attenuation (Absolute Value)	35 min.@1087.6 MHz	dB
	7 min.@1192.6 MHz	
	7 min.@1262.6 MHz	
	30 min.@1367.6 MHz	
Impedance	50	ohm
Max Input Power	1 max.	W
Operating Temperature	-40 to +85	°C

Outline Drawing

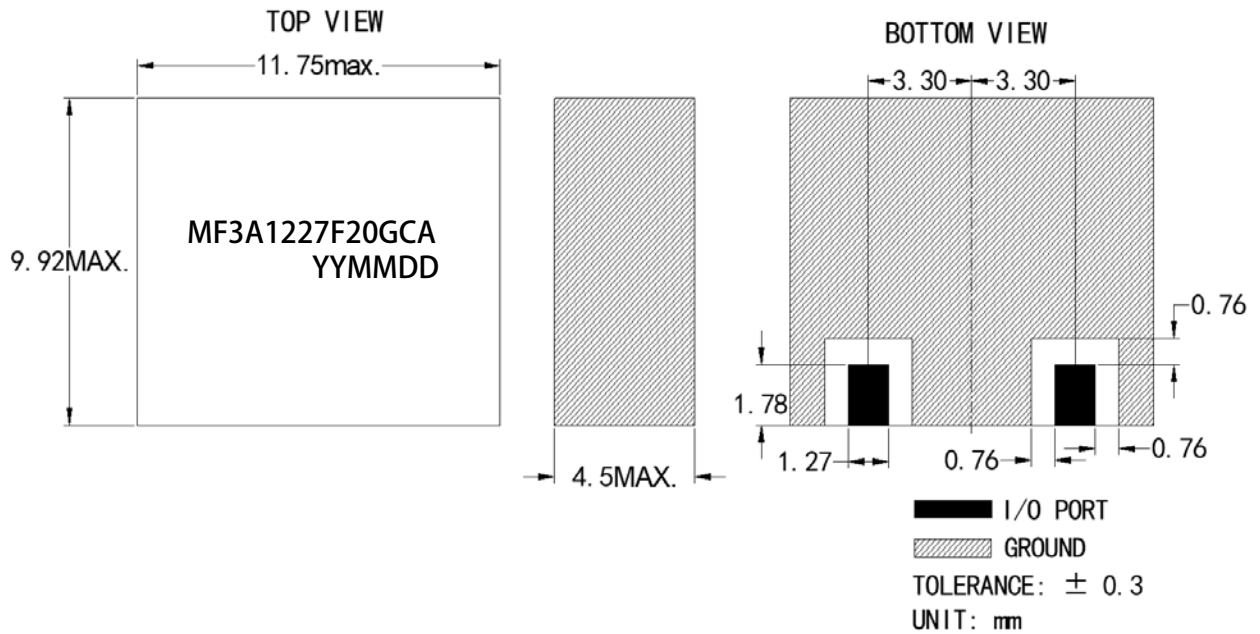


Recommended PCB Layout

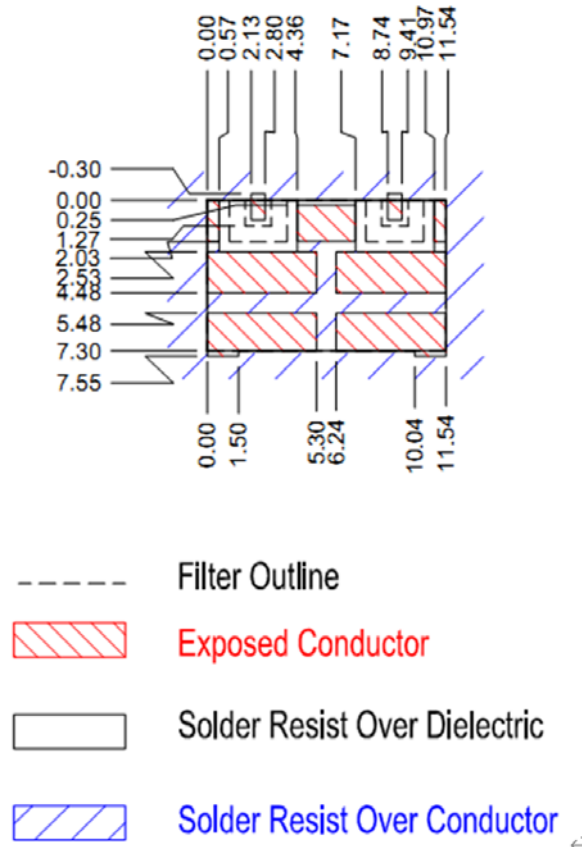

Remarks: Recommend to use silver-containing solder paste


Application Instructions:

- Recommended Soldering Temperature
 - Containing Pb Soldering,
Recommend the solder paste of melting points 183°C, soldering temperature won't exceed 230°C. Refer to the below reflow soldering profile.


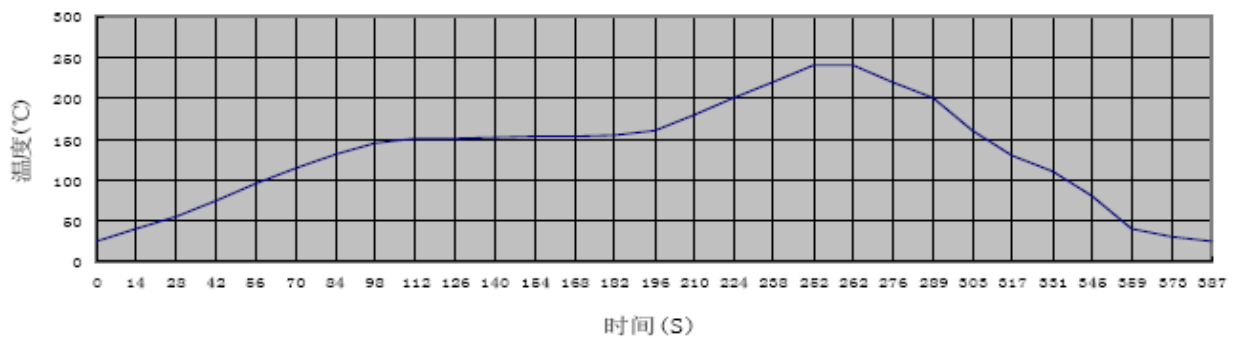


- Pb-free soldering
Recommend the solder paste of melting point 217°C, soldering temperature won't exceed


260°C. Refer to the below reflow soldering profile.

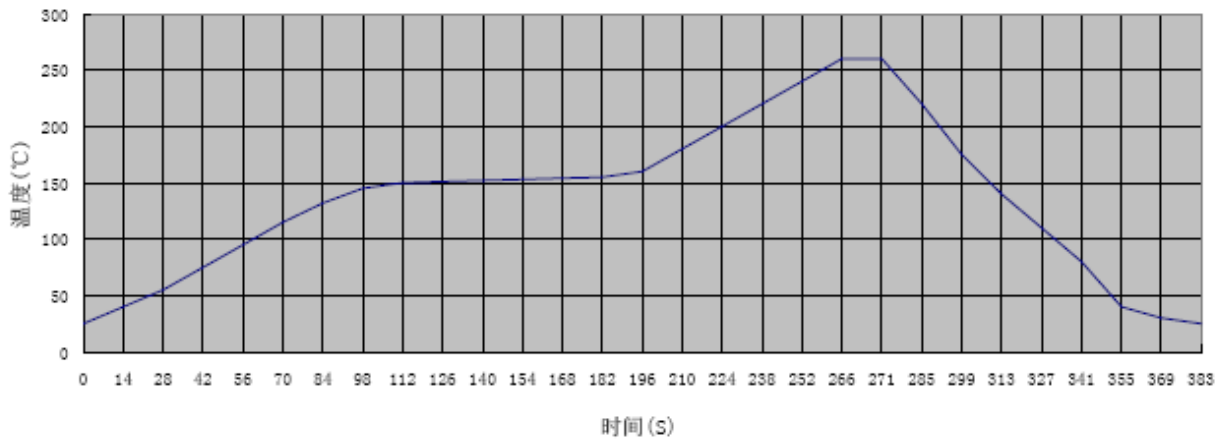

- PCB layout for soldering the filter should be designed in grid pattern. Refer to recommended PCB Layout for more details. Soldering Area is 50%-70% of ground area of this filter.

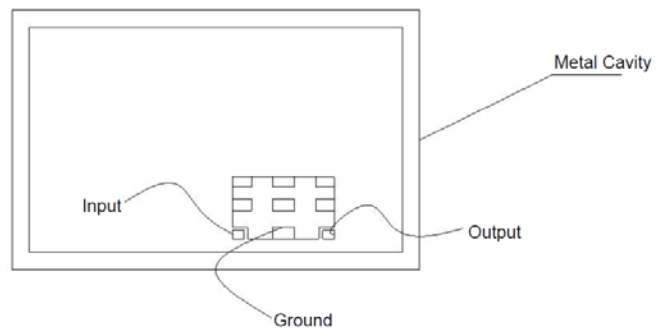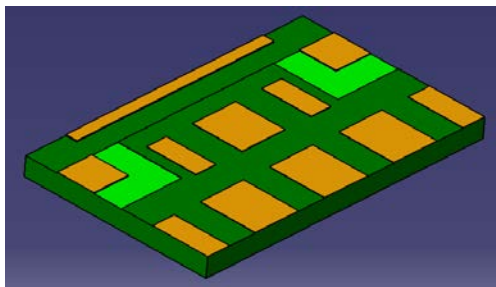

- This filter should be soldered 2mm (at least) away from metal cavity, in order to avoid degrading filter's performance by metal cavity. Refer to the below figure.

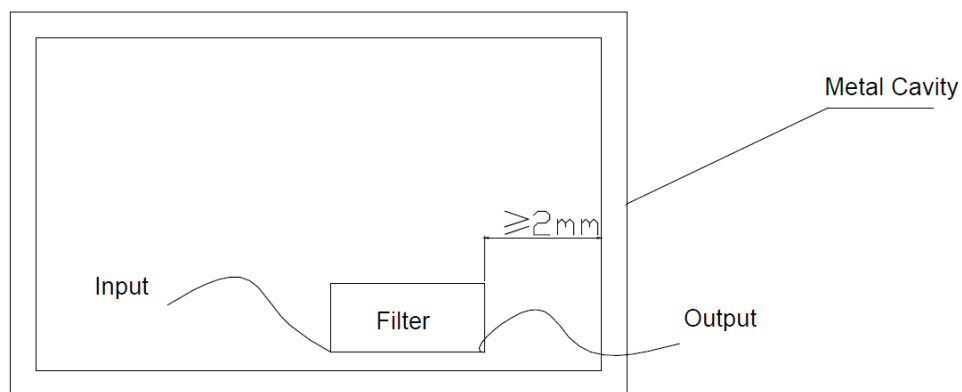

- It would achieve better performance that the top of the filter is grounded too.
- Mounting screws around the filter should be 1cm away from the filter.
- To avoid PCB transformation during mounting the filter.
- If customer will solder PCB of the filter on Aluminum plate, please contact us directly.