

Feature

Pass Bands: 6.95GHz ~ 7.55GHz, 7.45GHz ~ 8.05GHz, 11.95GHz ~ 12.55GHz, 12.45GHz ~ 13.05GHz;

Insertion Loss in pass bands: ≤ 9 dB

Isolation between pass bands: ≥ 30 dB

Size: 5.5x4.5x0.15mm

Description

This device is a FET switch filter bank MMIC based on GaAs processing, 2-4 decoder is integrated inside. Adopt +5V/0V logic control or -5V/0V logic control, switching time is less than 30ns typ. It has low loss, excellent isolation, and high integration.

The metallization processing of thru-holes on the plate ensures good grounding. Extra grounding measures aren't required, which is easy for application. The back metallization is suitable for eutectic sintering or conductive adhesive sticking processes.

Absolute Rating

| | |
|-----------------------|------------|
| Control Voltage | -1V~+5V |
| Input Power | 27dBm |
| Storage Temperature | -65~+150°C |
| Operating Temperature | -55~+125°C |

Electrical Specifications 1 ($T_A = +25^\circ\text{C}$)

| Spec. | Pass band 1 | Pass band 2 | Unit |
|----------------|-------------------------|-------------------------|------|
| Freq. Range | 6.95~7.55 | 7.45~8.05 | GHz |
| Insertion Loss | ≤ 9 | ≤ 9 | dB |
| Rejection | $\geq 40@5.7\text{GHz}$ | $\geq 40@6.2\text{GHz}$ | dBc |
| | $\geq 40@8.7\text{GHz}$ | $\geq 40@9.5\text{GHz}$ | dBc |
| VSWR | ≤ 1.8 | | — |


Electrical Specifications 2 ($T_A = +25^\circ\text{C}$)

| Spec. | Pass band 3 | Pass band 4 | Unit |
|----------------|--------------------------|--------------------------|------|
| Freq. Range | 11.95~12.55 | 12.45~13.05 | GHz |
| Insertion Loss | ≤ 9 | ≤ 9 | dB |
| Rejection | $\geq 40@10.5\text{GHz}$ | $\geq 40@11.0\text{GHz}$ | dBc |
| | $\geq 40@14\text{GHz}$ | $\geq 40@14.5\text{GHz}$ | dBc |
| VSWR | ≤ 1.8 | | — |


S2P file name: PDSBF4-6R95_13R05-5D8.s2p

Typical Test Curves


Pass band 1 Insertion Loss VS Frequency ($T_A=25^\circ\text{C}$)

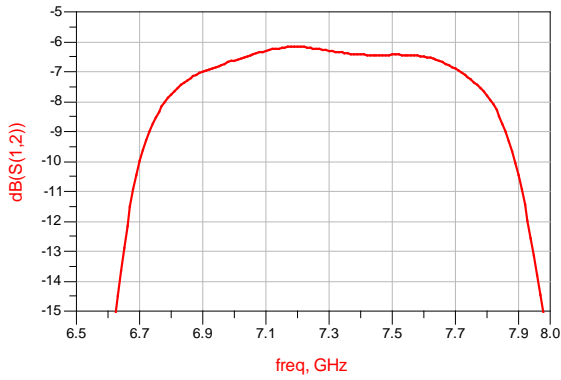


Pass band 2 Insertion Loss VS Frequency ($T_A=25^\circ\text{C}$)

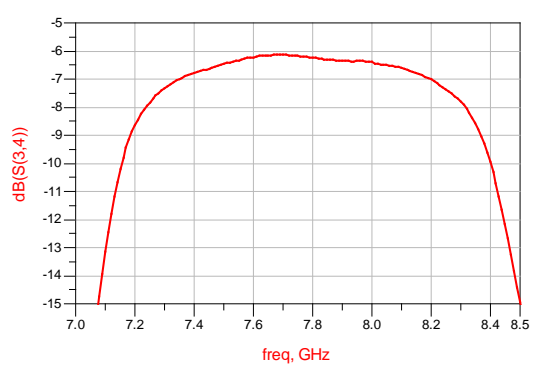


Pass band 3 Insertion Loss VS Frequency ($T_A=25^\circ\text{C}$)

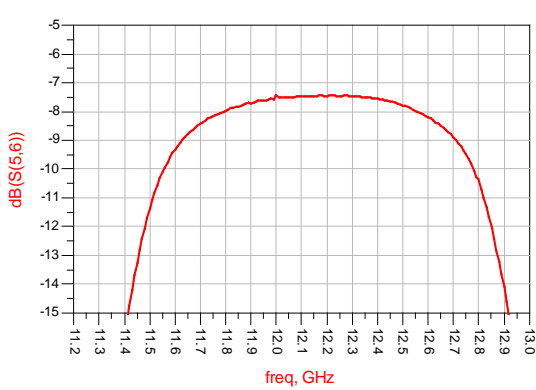


Pass band 4 Insertion Loss VS Frequency ($T_A=25^\circ\text{C}$)

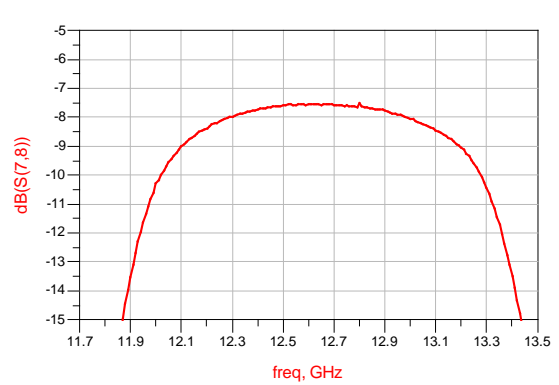


Insertion Loss VS Frequency ($T_A=25^\circ\text{C}$)

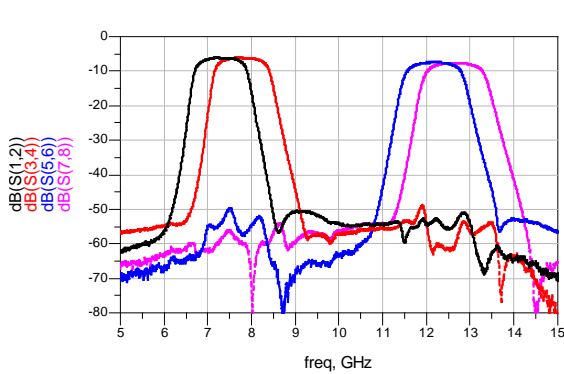

Return Loss VS Frequency ($T_A=25^\circ\text{C}$)

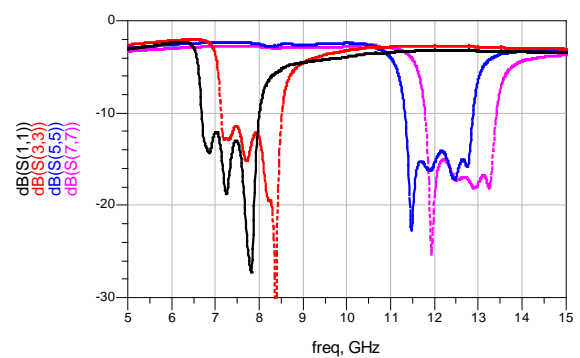

Mechanical Specification

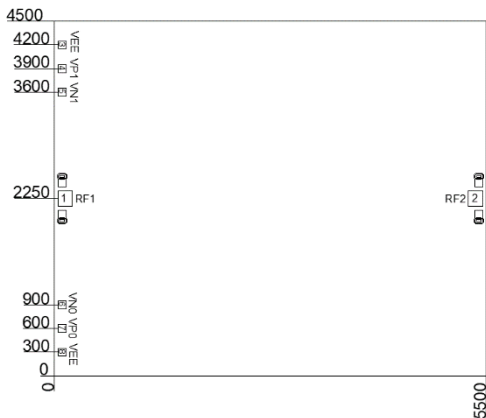

Truth Table

| Driver Voltage (VEE=-5V) | | | | Pass bands |
|--------------------------|-----|---------------|-----|----------------|
| +5/0V Control | | 0/-5V Control | | |
| VP1 | VP0 | VN1 | VN0 | |
| 0V | 0V | -5V | -5V | 6.95-7.55GHz |
| 0V | 5V | -5V | 0V | 7.45-8.05GHz |
| 5V | 0V | 0V | -5V | 11.95-12.55GHz |
| 5V | 5V | 0V | 0V | 12.45-13.05GHz |


PINS Definitions

| Pin No. | Symbol | Description |
|---------|----------|-----------------------------|
| 1, 2 | RF1, RF2 | RF Input, RF Output |
| 3, 8 | VEE | Driver Power Supply Voltage |
| 4, 7 | VP1, VP0 | +5/0V Control ports |
| 5, 6 | VN1, VN0 | 0/-5V Control ports |


Notes:

1. Dimensions are μm . Tolerance: $\pm 0.05\text{mm}$
2. Die thickness is 0.1mm
3. Typical bond pad is $100\mu\text{m} \times 100\mu\text{m}$, which is 50 μm away from chip edge.
4. The bottom of the device is gold plated, should be grounded.

Recommended Assembly Diagrams

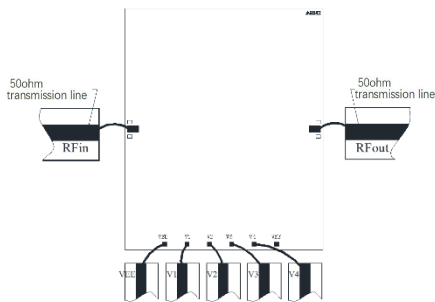

Functional Diagram

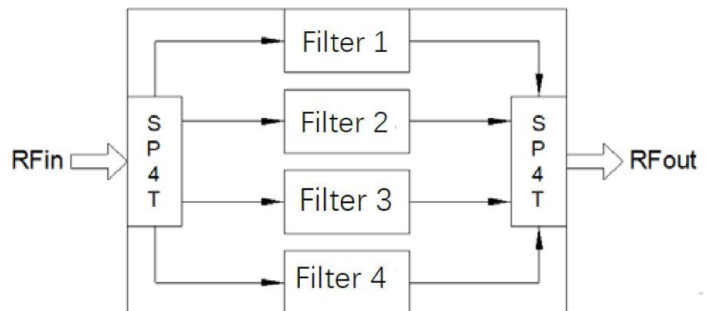

Application Notes:

1. The chip is back-metallized and can be die-mounted with AuSn eutectic preforms or with electrically conductive epoxy.
2. The die should be assembled on carriers like Kovar or Mu-Cu which have same Coefficient of thermal expansion. ($5.8 \times 10^{-6}/^\circ\text{C}$) with GaAs.
3. Recommend using $\Phi 25\mu\text{m}$ Au wire for bonding, whose length is around 200 μm .
4. Sinter by AuSn (80/20), which doesn't exceed 300 $^\circ\text{C}$ within 30 seconds max.
4. Handle the chips in a clean environment. DO NOT attempt to clean the chip using liquid cleaning systems.
5. Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers.
6. The device is sensitive to ESD. ESD protection is required during storage and usage.
7. If you have any questions, please contact us.