Cavity Filter

Selection Guide

南京舜特科通信技术有限公司

Sainty-Tech Communications Limited

June 2021

INTRODUCTION

RF cavity filter is one of four most common filters in today. It is a type of resonant filter. The most common method is to generate metal resonator through metal shell with thick metal coil. Multiple metal resonators are utilized to form a cavity filter.

Cavity filter designs are available in the frequency range of 300 MHz to 40 GHz and with bandwidth options from less than 1% to 70%. Cavity filters offer very low insertion loss, excellent rejection out of bands and stable performance over temperature. Customization is also available. Cavity filters are widely used in many applications, such as Microwave Telecommunications, 5G Communications, IoT, Radar, ECM, Aerospace, Navigation etc.

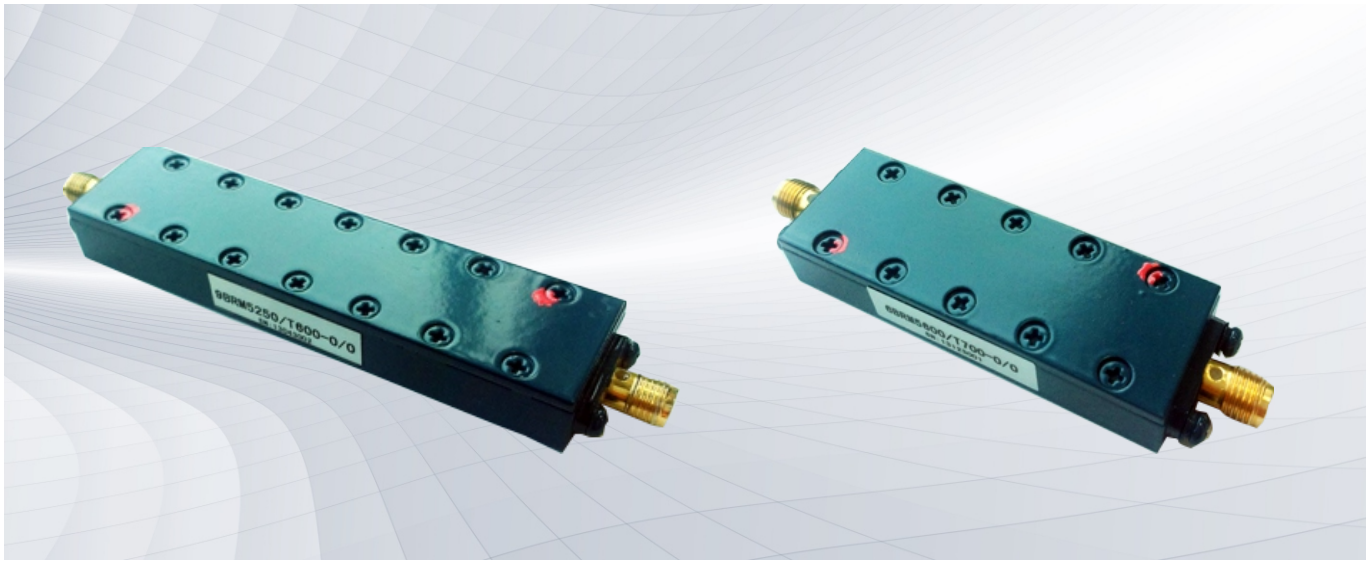

Cavity Filter

Part Number	Center Freq. (MHz)	Typ. BW (MHz)	Typ. IL@ f0 (dB)	Min. Rejection (dBc)	Size (mm)
4HL10-386.46/T3-O/O	386.46	7.43 (3dB)	1.5	30@f0±10MHz	135×50×32
4HL10-393.66/T3-O/O	393.66	8.8(3dB)	1.37	30@f0±10MHz	135×50×32
4HL10-397.26/T3-O/O	397.26	7.69(3dB)	1.47	30@f0±10MHz	135×50×32
3FS10-1050/U20-O/O	1050	-	-	55@DC-700MHz	48×49×16
4FS10-1105/U290-P/P	1105	455(0.5dB)	-	10@DC-750MHz	70×39×40
5CC20-1200/U6-O/O	1200	6.6(1dB)	1.34	39@f0±7MHz	90×90×42
4FS10-1268.52/H50-O/O	1268.52	-	-	20@1.33-1.35GHz	135×39×50
5FS10-1268.52/T21-O/O	1268.52	21.1(3dB)	0.6	40@1244&1293MHz	150×36×46
4BJ10-12740/U12-O/O	1274	22(1dB)	-	40@12.69&12.79GHz	73×28×16
4FS10-1406/T80-P/P	1406	-	0.5	40@1.25&1.55GHz	57×36×16
4FS10-1406/T80-P/P	1406	-	0.5	40@1.25&1.55GHz	57×36×16
8CC20-1575/T50-O/O	1575	59.8(3dB)	0.76	33@DC-1535MHz	87×47×35
4FS10-1575.42/U3-MCX	1575.42	10(1dB)	1.39	40@1556&1593MHz	86.25×60×27
4FS10-1638/U16-O/O	1638	25(1dB)	0.6	50@1695-1700MHz	60×60×25
5FS10-1650/H100-O/O	1650	131(0.5dB)	-	40@1.48&1.81GHz	60×20×30
7CC20-1680/U70-O/O	1680	87.6(1dB)	1.09	40@1.6&1.75GHz	48×37×26
4FS10-1800/T100-P/P	1800	150.1(3dB)	0.27	40@f0±220MHz	57×21×29
7FS10-1840/U100-O/O	1840	168.2(1dB)	-	30@1660-1740MHz	81×19×27
8FS10-2000/U200-O/O	2000	310(1dB)	-	55@f0±300MHz	80×20×25
4FS10-2036/T80-P/P	2036	115(3dB)	0.55	30@f0±110MHz	57×29×16
5FS10-2095/U30-O/O	2095	43(1dB)	-	85@f0±150MHz	123×35×25
12CC10-2150/H40-O/O	2150	88(1dB)	0.72	70@f0±100MHz	143×52×26.5
4CC10-2240/T40-P/P	2240	68(3dB)	0.7	30@f0±80MHz	57×29×16
4FS10-2250/H100-O/O	2250	143(0.5dB)	-	50@5.5-5.7GHz	58×25×16
4FS10-2280/T100-P/P	2280	130.8(3dB)	0.42	35@f0±200MHz	57×21×27
6FS10-2280/T40-P/P	2280	50(3dB)	1.57	35@2.2&2.32GHz	41×30×25
4HD20-2282/U22-P/P	2282	39.6(1dB)	-	20@f0±40MHz	84×80×35.8
3CC10-2300/U20-O/O	2300	52.5(1dB)	-	38@2.2&2.5GHz	45×21×28
6CC20-2300/U20-O/O	2300	30.3(1dB)	-	40@2269&2329GHz	133×90×30
5CC20-2360/H50-P/P	2360	63.6(0.5dB)	0.91	40@2.28&2.44GHz	40×24×22
4FS10-2443/T30-O/O	2443	87.9(3dB)	-	65@f0±400MHz	68×28×18
4HD10-2492/T8-O/O	2492	9(3dB)	0.67	40@f0±20MHz	90×90×38

Cavity Filter

Part Number	Center Freq. (MHz)	Typ. BW (MHz)	Typ. IL@ f0 (dB)	Min. Rejection (dBc)	Size (mm)
8FD10-3000/U250-P/P	3000	270(1dB)	-	40@2.8&3.2GHz	65×28×13
4FS10-3120/H300-P/P	3120	450.1(0.5dB)	-	40@2.18&3.75GHz	30×23×10.5
13FD10-3125/T250-P/P	3125	268(2dB)	1.09	40@2960&3285MHz	100×34×12.5
5FS10-3300/T50-O/O	3300	87.2(3dB)	0.8	40@f0±90MHz	64×26×12
7CC10-3360/T100-O/O	3360	132(3dB)	-	80@3.6&6.69GHz	100×32×18
8FS10-3400/U220-P/P	3400	227.6(1dB)	0.88	40@f0±200MHz	96×20×13
8FD10-3400/U250-P/P	3400	270(1dB)	-	80@3.2&3.61GHz	65×28×13
8CC10-3600/T100-O/O	3600	163.3(3dB)	-	80@3.36&6.96GHz	113×32×18
9FS10-3720/U200-P/P	3720	218.1(1dB)	0.78	65@f0±200MHz	83×12×15.5
7FD10-3750/U500-O/O	3750	640(1dB)	0.2	70@4.7-5GHz	53×30×13
9FS10-3920/U200-P/P	3920	206.5(1dB)	1.04	65@f0±200MHz	83×12×15.5
6FD10-4000/H1000-SMP	4000	1482.1(0.5dB)	-	30@f0±1500MHz	36×29×13
9FS10-4020/U50-P/P	4020	64.3(1dB)	2.51	80@f0±100MHz	83×12×15.5
5FD10-4050/H300-O/O	4050	410.2(0.5dB)	0.21	40@3.58&4.51GHz	50×25×15
9FS10-4120/U200-P/P	4120	213(1dB)	1.03	65@f0±200MHz	83×12×15.5
6FS10-4150/H100-N/N	4150	115(0.5dB)	-	40@4.04&4.25GHz	86×60×24
8FD10-4150/H1400-P/P	4150	1680(0.5dB)	-	60@2.6&6GHz	38×25×10
9FS10-4220/U50-P/P	4220	65.9(1dB)	2.45	80@f0±100MHz	83×12×15.5
9FD10-4400/U400-O/O	4400	412.6(1dB)	0.63	40@4.1&4.7GHz	61×27×13
9FS10-4520/U50-P/P	4520	67.9(1dB)	2.47	80@f0±100MHz	83×12×15.5
5FS10-4550/H120-O/O	4550	150(0.5dB)	1.15	40@4.39&4.72GHz	56×31×12.5
6FD10-4720/H1000-SMP	4720	1512.8(0.5dB)	-	30@f0±1500MHz	36×29×13
3FD10-4940/U30-O/O	4940	66.1(1dB)	-	60@DC-4GHz	37×23×13
6FD10-4950/H500-O/OP	4950	594.3(0.5dB)	0.42	65@3.5-4GHz	52×24×14
10CC20-5000/U1000-O/O	5000	1050(1dB)	0.28	65@f0±1000MHz	82×37×15
6FS10-5250/U110-P/P	5250	140(1dB)	-	20@5.4-5.5Hz	60×20×10
3FS10-5350/U400-P/P	5350	507.3(1dB)	-	40@2-2.15GHz	24×15×12
13FD10-5500/H1000-O/O	5500	1046(0.5dB)	-	55@f0±700MHz	100×24×17.5
5FD10-5600/U65-O/O	5600	93.1(1dB)	1.56	40@f0±110MHz	42×21×10
8FD10-5625/H550-P/P	5625	622(0.5dB)	-	40@f0±475MHz	66×20×14
9FD10-5650/U500-P/P	5650	580(1dB)	-	55@f0±500MHz	70×23×13
7FD10-5750/U200-P/P	5750	329(1dB)	-	70@5.15&7.15GHz	55×21×12

Cavity Filter

Part Number	Center Freq. (MHz)	Typ. BW (MHz)	Typ. IL@ f0 (dB)	Min. Rejection (dBc)	Size (mm)
6FD10-5800/U400-O/O	5800	466(1dB)	-	30@f0±400MHz	45×22×12
5FD10-5850/U130-O/O	5850	249.2(1dB)	-	40@5.57&6.14GHz	62×23×15
9FD10-6250/U600-O/O	6250	730(1dB)	0.35	35@5.7&6.74GHz	48×21×12
5FS10-6300/T60-O/O	6300	122(3dB)	1.2	40@6.15&6.44GHz	46×16×8
6FS10-6300/U800-O/O	6300	878(1dB)	0.2	38@f0±800MHz	70×19×12
8FD10-6400/U1800-O/O	6400	2126.1(1dB)	0.51	40@4.82&7.92Hz	77×25×12
6FD10-6590/U400-P/O	6590	419.4(1dB)	-	40@6.2&6.98GHz	47×20×12.5
9FD10-6600/U500-O/O	6600	690(1dB)	0.63	40@6.13&7.08GHz	58×25×9
7FD10-6750/U1520-OP/O	6750	1661(1dB)	-	35@f0±1450MHz	38×22×10
8FD10-6795/U180-P/P	6795	232.1(3dB)	-	40@6.62&6.97Hz	67×20×13
5FD10-6900/U400-P/P	6900	500(1dB)	0.53	65@4.4&7.9GHz	36×19×10
5FD10-6960/T120-O/O	6960	836.8(3dB)	-	80@f0±3360MHz	28×20×11
8FD10-7000/T800-OP/O	7000	998(3dB)	-	60@f0±940MHz	45×21×11
13FS10-7140/U500-O/O	7140	529.1(1dB)	-	40@6.8&7.5GHz	120×40×13
6FS10-7160/T100-O/O	7160	127(1dB)	0.8	40@f0±150MHz	81×16×16
3HD10-7210/U7-O/P-1	7210	13.3(1dB)	1.05	25@f0±30MHz	57×20×15
4FD10-7210/T100-O/O	7210	145.7(3dB)	0.98	25@f0±150MHz	35×18×11
6FS10-7210/T300-O/O	7210	390(3dB)	0.65	25@f0±310MHz	47×17×12
3HD10-7223/U7-O/P-1	7223	14.2(1dB)	1.1	40@f0±45MHz	57×20×15
7FD10-7500/U500-O/O	7500	720(1dB)	-	95@4.85-5.35GHz	56×19×12
7FD10-7500/U1800-O/O	7500	1846(1dB)	0.22	75@f0±4GHz	45×19×13
4FD10-7700/U200-P/P	7700	294(1dB)	0.55	40@7.2&8.3GHz	33×19×11
6FD10-7730/U200-O/O	7730	213.7(1dB)	-	40@f0±230MHz	60×20×13
4FD10-7970/H100-O/O	7970	233.4(1dB)	-	20@7.58&8.26GHz	38×17×12
5FD10-8000/H2000-SMP	8000	2648(0.5dB)	0.22	40@f0±4000MHz	32×20×13
7FS10-8050/U600-O/O	8050	650(1dB)	-	40@7.5&8.75GHz	80×17×12
7FD10-8150/U500-O/O	8150	567(1dB)	-	40@7.68&8.6GHz	58×18×13
9FD10-8200/H800-O/O	8200	863(0.5dB)	-	10@f0±520MHz	58×25×9
8FD10-8220/H450-O/O	8220	-	0.74	40@7.77&8.66Hz	67×19×13
7FD10-8225/U500-P/O	8225	540.5(1dB)	1.06	30@DC-7775MHz	55×21×12
4FS10-8250/U500-P/P	8250	659.5(1dB)	-	70@16-18GHz	27×16×8
8FD10-8300/U125-O/O	8300	227.7(1dB)	1.41	50@f0±300MHz	68×19×13

Cavity Filter

Part Number	Center Freq. (MHz)	Typ. BW (MHz)	Typ. IL@ f0 (dB)	Min. Rejection (dBc)	Size (mm)
3FD10-8400/T50-P/P	8400	158(3dB)	1.02	60@7.5&9.3GHz	35×19×14
10FD10-8400/U2000-O/O	8400	2230(1dB)	0.15	40@6.92&9.85GHz	56×19×12
6FS10-8420/T100-O/O	8420	138.2(1dB)	0.86	35@f0±150MHz	81×16×16
4FD10-8450/T50-O/O	8450	78.5(3dB)	2.65	20@f0±75MHz	35×18×11
4FD10-8450/T150-O/O	8450	213.3(3dB)	1.19	25@f0±225MHz	35×18×11
4HD10-8475/H50-P/P	8475	87.2(3dB)	0.74	100@7.1-7.3GMHz	35×35×16
7FD10-8500/U1100-P/P	8500	1145(1dB)	0.51	40@7.54-9.42GMHz	45×18×12
5FD10-8620/U120-P/P	8620	138.5(1dB)	1.6	40@f0±200MHz	38×16×11
5FD10-8680/H200-O/O	8680	238.2(0.5dB)	0.69	50@f0±400MHz	50×18×13
5FD10-8750/H30-P/P	8750	72(1dB)	2.97	72@f0±220MHz	36×14.5×7.5
5FS10-8800/U40-P/P	8800	85.4(1dB)	2.47	40@8686&8922MHz	51×18×11
8FD10-8820/U300-O/O	8820	332.1(1dB)	-	50@f0±300MHz	67×19×13
6HD10-8838/H15-O/O	8838	19.5(0.5dB)	3.64	55@f0±60MHz	90×21×17
6FD10-9000/U1600-O/O	9000	1764(1dB)	0.37	70@DC-4.9GHz	41×19×13
9FD10-9000/U400-O/O	9000	440(1dB)	0.75	40@8.68&9.31GHz	79×18×13
3FD10-9200/H430-O/OP	9200	460.2(0.5dB)	0.31	35@f0±2135MHz	33×18×13
5FS10-9200/U40-P/P	9200	78.1(1dB)	2.07	40@9084&9322MHz	51×18×11
3FD10-9210/U130-O/O	9210	148.5(1dB)	0.71	34@f0±315MHz	41×18×13
6FS10-9220/U220-O/O	9220	240.4(1dB)	-	70@1000-8520MHz	53×30×12
6HD10-9222/H15-O/O	9222	15.9(0.5dB)	3.94	55@f0±60MHz	90×21×17
6FD10-9238/U180-P/P	9238	211.8(1dB)	-	60@f0±320MHz	60×17×13
7FD10-9300/H600-P/P	9300	652.1(1dB)	0.49	70@f0±1.2GHz	56×13×13
6FD10-9358/U460-P/P	9358	515.1(1dB)	0.79	60@DC-8.6GHz	50×17×13
4FD10-9405/U70-P/P	9405	132.2(1dB)	1.3	60@f0±350MHz	45×17×13.5
7FD10-9500/U1000-P/P	9500	1045(1dB)	0.52	60@f0±1.2GHz	42×18×11
7FD10-9600/U1000-P/P	9600	1240(1dB)	-	50@DC-8.1GHz	56×17×16.5
8FD10-9600/H1600-O/O	9600	1750(0.5dB)	0.9	40@8&11.2GHz	62×20×12
8FD10-9600/U1600-P/P	9600	2136(1dB)	-	40@8&11.2GHz	56×17×16.5
6FD10-9750/H600-P/P	9750	697.1(0.5dB)	0.5	40@9.09&10.42GHz	38.5×17×11
7FD10-9750/U1520-OP/O	9750	1650(1dB)	0.36	35@f0±1450MHz	38×22×10
6FS10-9900/H1000-P/P	9900	1140(1dB)	-	35@8.72&10.88GHz	42×17×9
5HD10-10000/T50-O/O	10000	55.9(3dB)	1.63	40@f0±100MHz	82×22×16

Cavity Filter

Part Number	Center Freq. (MHz)	Typ. BW (MHz)	Typ. IL@ f0 (dB)	Min. Rejection (dBc)	Size (mm)
6FD10-10100/T800-O/O	10100	926(3dB)	0.47	70@DC-8500MHz	50×17×12
5FS10-10300/T60-O/O	10300	75.2(3dB)	2.4	40@10.18&10.42GHz	45×15×8
7FD10-10300/H600-P/P	10300	640.5(0.5dB)	-	55@f0±800MHz	56×13×13
5FD10-10320T200-O/O	10320	466.1(3dB)	-	40@9.8&10.8Hz	49×18×13
6HD10-10486/T12-OP/OP	10486	13.2(3dB)	4.3	40@f0±20MHz	33×47×16
6BJ20-10520/U100-O/O	10520	131.5(1dB)	-	60@f0±200MHz	52×75×18
6FD10-10700/U300-P/P	10700	357(1dB)	1.1	40@10.33&11.04GHz	45×14×9
7FD10-10700/H600-P/P	10700	710(1dB)	-	55@f0±800MHz	56×13×13
7FD10-10950/U500-O/OP	10950	591.1(1dB)	-	40@10.44&11.45GHz	54×17×13
8FD10-11000/H1800-O/O	11000	1980(0.5dB)	0.68	40@9.41&12.53GHz	62×20×12
6FS10-11200/T280-O/O	11200	260(3dB)	0.55	40@f0±300MHz	36×36×13
8FD10-11200/U1600-S/S	11200	1702.1(1dB)	0.8	50@f0±1500MHz	40×14×9
11FD10-11250/U3500-O/O	11250	3650.4(1dB)	-	60@8.5&14GHz	45×17×11
4FS10-11500/U840-P/P-2	11500	1129(1dB)	0.42	65@5.84&16.62GHz	30×15×14
9FD10-11500/U1000-P/P	11500	1104(1dB)	-	60@10.5&21GHz	51×17×11
6FD10-11550/U600-P/P	11550	742.7(1dB)	0.68	40@10.9&12.23GHz	41×14×9
3FD10-11630/T100-P/P	11630	193.2(3dB)	1.2	80@6&16GHz	31×17×11
7FD10-11700/H600-P/P	11700	680(1dB)	-	55@f0±800MHz	56×13×13
5FD10-11915/U2000-O/O	11915	2771.9(1dB)	-	30@f0±110MHz	35×20×15
5FD10-12500/H500-P/P	12500	556.2(0.5dB)	-	60@f0±1.5GHz	37×16×11
8FD10-12500/H1000-O/O	12500	1319(0.5dB)	0.33	40@11.54&13.55GHz	63×21×11
7FD10-12900/U1400-P/P	12900	1575(1dB)	0.43	70@f0±2.2GHz	42×17×11
5FD10-12900/U1000-O/O	12900	11050(1dB)	0.26	40@11.6&14.2GHz	35×16×11
6BJ20-12900/T400-O/O	12900	462(3dB)	-	40@12.5&13.4GHz	114×25×15
8FD10-13000/T800-OP/O	13000	839.3(3dB)	-	60@f0±800MHz	61×18×13
3FS10-13140/U500-P/P	13140	689(1dB)	0.29	40@f0±1750MHz	32×13×10.5
4FS10-13140/U1050-P/P	13140	1309(1dB)	-	40@11.3&15.2GHz	32×13×10.5
7FD10-13200/U600-O/OP	13200	840(1dB)	-	40@12.43&13.82GHz	54×17×13
7FS10-13400/U100-SMP	13400	127(1dB)	3.8	70@f0±200MHz	58×14×11
8FD10-13500/T800-OP/O	13500	1004(1dB)	-	60@f0±940MHz	59×17×12
7FS10-13600/U100-SMP	13600	131(1dB)	3.87	70@f0±200MHz	55×15×11
7FS10-13800/U100-SMP	13800	133(1dB)	0.39	70@f0±200MHz	58×14×11

Cavity Filter

Part Number	Center Freq. (MHz)	Typ. BW (MHz)	Typ. IL@ f0 (dB)	Min. Rejection (dBc)	Size (mm)
7FD10-13850/U300-P/P	13850	700.6(1dB)	-	60@f0±1000MHz	57×17×12
9FD10-14000/T800-OP/O	14000	898.3(3dB)	-	60@f0±800MHz	66×18×13
4BJ10-14013/U18-O/O	14013	22(1dB)	-	40@13.97&14.06GHz	68×25×15
4BJ10-14075/U12-O/O	14075	18(1dB)	-	40@14.03&14.12GHz	68×25×15
4BJ10-14198/U18-O/O	14198	24(1dB)	-	40@14.12&14.25GHz	68×25×15
7FD10-14250/U1520-OP/O	14250	1746(1dB)	0.52	33@f0±1450MHz	41×22×10
4BJ10-14305/U12-O/O	14305	20(1dB)	-	40@14.25&14.37GHz	68×25×15
4FD10-14400/T160-P/P	14400	284.4(3dB)	1.76	60@f0±800MHz	37×17×10
5FD10-14400/U800-O/O	14400	1029(1dB)	-	70@f0±2500MHz	37×17×10
3BJ10-14500/U120-P/P	14500	146.2(3dB)	0.93	40@14.1&14.9GHz	45×30×11
6FD10-14500/U3600-P/P	14500	4256(1dB)	-	40@10.5&18.3GHz	30×16×12
5FD10-14570/U600-P/P	14570	753(1dB)	1.01	40@f0±300MHz	35×16×9.5
8FD10-14750/H1500-O/O	14750	1640(0.5dB)	0.71	40@13.3&16.2GHz	63×21×11
11FD10-14750/U3500-O/O	14750	3580(1dB)	-	35@12.4&17.1GHz	47×17×11
7FS10-14800/U100-O/O	14800	130.6(1dB)	4.29	65@f0±250MHz	70×17×12
9BJ10-14800/H400-O/O	14800	486.2(0.5dB)	0.53	40@14.46&15.15GHz	84×39×14
11FD10-14800/T700-O/O	14800	816.1(3dB)	-	40@14.3&15.4GHz	69×16×11
12FD10-14800/U3300-O/O	14800	3358(1dB)	0.56	58@f0±2.4GHz	65×18×11
5FS10-14940/U500-P/P	14940	780.5(1dB)	-	40@14.11&15.82GHz	51×13×10.5
5FD10-15000/T150-P/P	15000	230.1(3dB)	0.55	65@f0±500MHz	45×15×10.5
6FS10-15000/U1050-P/P	15000	1160(1dB)	-	40@13.9&16.2GHz	51×13×10.5
4FD10-15100/T500-O/O	15100	880.1(3dB)	-	40@13.9&16.3GHz	32×16×11
11FD10-15400/T700-O/O	15400	831.1(3dB)	-	40@14.9&16GHz	68×16×11
5FD10-15500/U500-P/P	15500	602.4(1dB)	-	50@f0±1000MHz	32×18×10
9FD10-15500/T800-OP/O	15500	950.6(3dB)	1.14	60@f0±830MHz	62×17×12
4FD10-15520/U500-P/P	15520	662.4(1dB)	0.86	50@f0±1500MHz	30×16×9.5
11FD10-15700/T700-O/O	15700	820(3dB)	-	50@15.1&16.3GHz	69×16×11
5BJ10-16000/U100-O/O	16000	158(1dB)	0.68	70@f0±400MHz	85×22×13.5
8FS10-16500/U800-O/O	16500	879(1dB)	-	65@f0±1000MHz	50.5×15×15
6FD10-16550/T500-O/O	16550	576.2(3dB)	1.15	40@15.9&17.1GHz	48×17×10.5
12FD10-17000/T1000-OP/O	17000	1093(3dB)	0.77	60@f0±800MHz	73×17×11
4FD10-17800/U800-O/O	17800	1214(1dB)	0.46	60@9.1&26.1GHz	30×17×11

Cavity Filter

Part Number	Center Freq. (MHz)	Typ. BW (MHz)	Typ. IL@ f0 (dB)	Min. Rejection (dBc)	Size (mm)
10FD10-18000/T800-OP/O	18000	949.6(3dB)	-	60@f0±800MHz	61×18×13
3BJ10-18100/U120-O/O	18100	135.2(1dB)	0.75	40@17.7&18.5GHz	43×23×11
3BJ10-18100/U120-P/P	18100	135.8(3dB)	0.88	40@17.7&18.5GHz	43×23×11
9FD10-18750/U5500-O/O	18750	6.15(1dB)	0.4	50@10.75&24GHz	38×12.5×9
12FD10-19000/T1000-OP/O	19000	1137.1(3dB)	1.27	60@f0±800MHz	73×17×11
12FD10-20000/T1000-OP/O	20000	1063.7(3dB)	1.52	60@f0±800MHz	73×17×11
13FD10-20300/U1800-O/OP	20300	2013(1dB)	1.15	40@19&21.6GHz	62×16×11
6FD10-20400/H1600-P/P	20400	2190(0.5dB)	-	40@18.4&22.5GHz	32×16×10
5FD10-20550/U600-P/P	20550	933(1dB)	0.44	35@1.95&2.17GHz	30×15×10
5BJ10-21650/H750-K/K	21650	997.5(0.5dB)	0.66	40@20.6&22.9GHz	52×19×12
5FS10-23800/T500-P/P	23800	543.7(3dB)	1.4	40@f0±1000MHz	30×14×11
5BJ10-25520/U320-P/P	25520	491.2(1dB)	0.9	40@f0±700MHz	46×18×11
5BJ10-25520/U250-P/P	25520	482.1(1dB)	1.05	40@f0±500MHz	46×18×11
9BJ10-25520/U650-P/P	25520	757.1(1dB)	1.05	15@f0±475MHz	78×18×11
5BJ10-26400/U337.5-P/P	26400	501.8(1dB)	0.89	35@f0±600MHz	44×18×11
9BJ10-26400/U750-P/P	26400	854.5(1dB)	1.04	15@f0±525MHz	74×18×11
4BJ10-32050/U600-K/K	32050	1540(1dB)	-	50@DC-24GHz	32×17×10

CONTACT US

Address: Buliding 3-801,Zijin R&D Center,No.89 Shengli Road,Jiangning,Nanjing 211100,China

Tel: +86 (25) 52635773

Email: sales@sainty-tech.com

Fax: +86 (25) 52632557

Website: www.sainty-tech.com