


Performance

- Frequency: 2~18GHz
- Typical Signal Gain: 12dB
- Typical Pout: 35dBm@28V
- Typical PAE: 20%
- Typical Idq: 0.6A
- Bias: 24V, -1.8V (Typ.)
- Technology: 0.2um HEMT
- Size: 3.3*1.8mm*0.08mm

Function Diagram

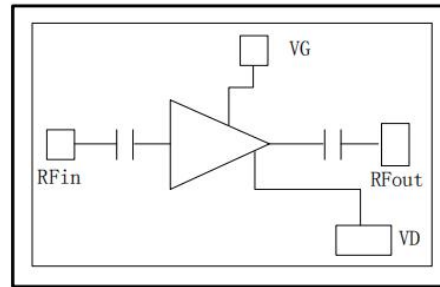


Electrical Specifications (TA=25°C, Vd=28V, Idq=0.6A, F: 2~18GHz, CW)


Symbol	Parameter	Min	Typical	Max	Unit
G	Small Signal Gain	-	12	-	dB
Gp	Power Gain	-	8	-	dB
Pout	Saturated Power	-	35	-	dBm
PAE	Power Added Efficiency	-	20	-	%
Id	Dynamic current	-	0.8	-	A





Test Curves

Small Signal Gain

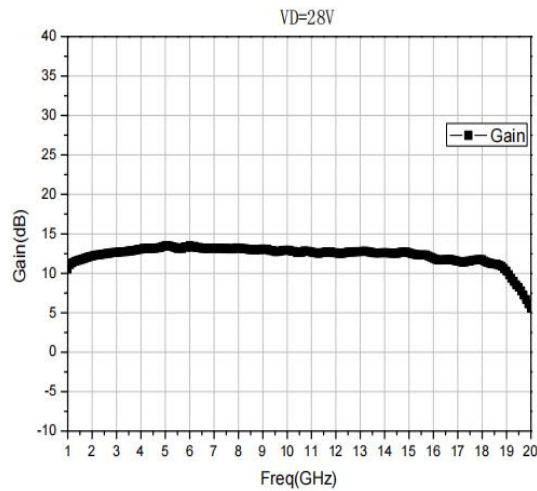

VSWRin

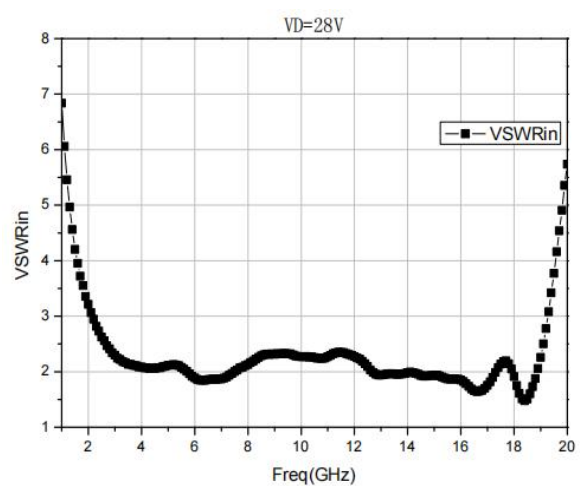


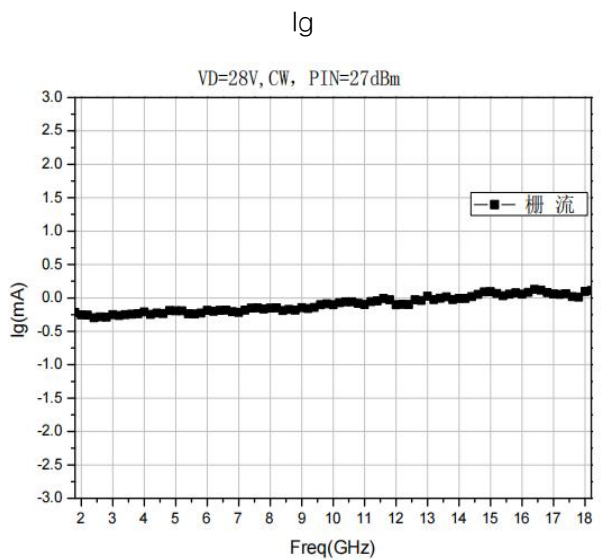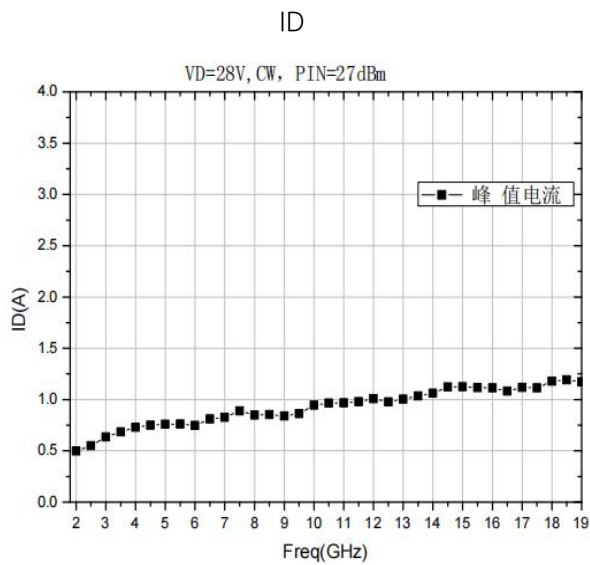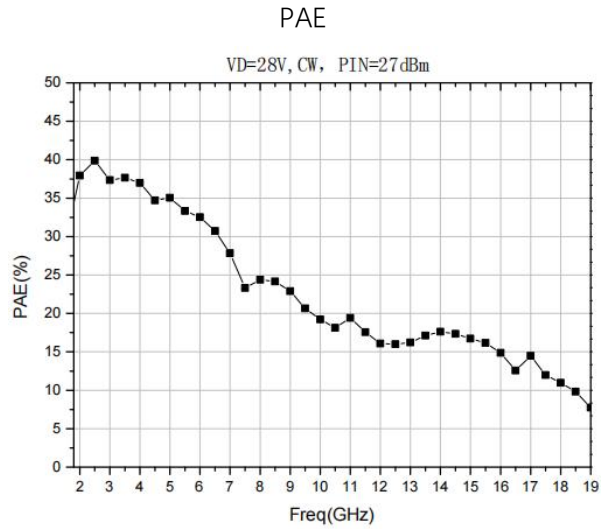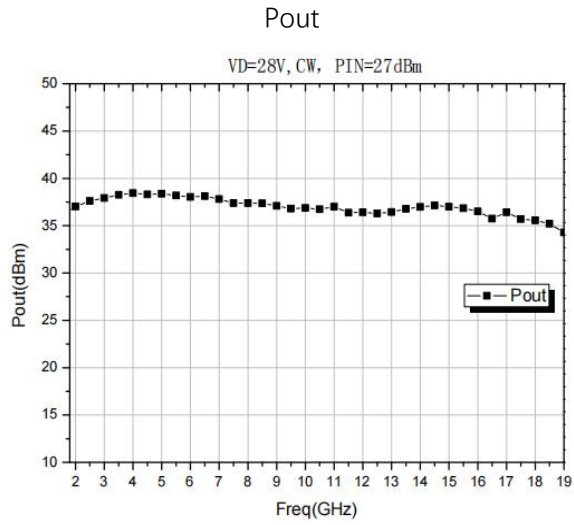





Absolute Max Ratings (TA=25°C)

Symbol	Parameter	Value	Remark
Vd	Drain Voltage	32V	
Id	Drain Current	2.0A	
Vg	Gage Voltage	-10V	
Ig	Gate Current	100mA	
Pd	DC Power	40W	
Pin	Input Power	35dBm	
Tch	Channel Temperature	225°C	

Exceeding any one or combination of these limits may cause permanent damage.

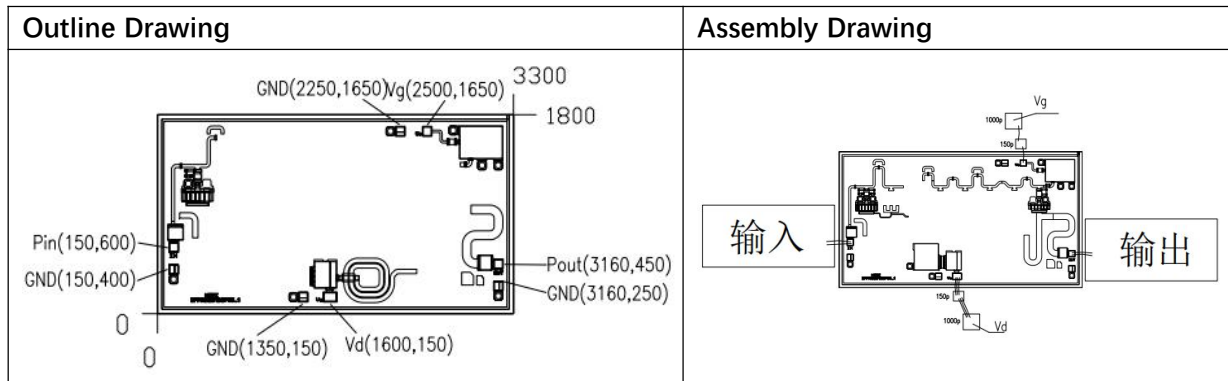

Pads Definition

Pad	Description	Equivalent Circuit
RFIn	RF Signal input, connect to 50ohm system, block capacitor is needed if there's external DC applied on this pad.	
RFout	RF Signal output, connect to 50ohm system, no need block capacitor.	
VG	Amp gate bias, external 100pF, 1000pF capacitor is needed	
VD1, VD2, VD3	Amp drain bias, external 100pF, 1000Pf capacitor is needed	
GND	Bottom must connect to RF and DC ground	