

Feature

- Precision MEMS process
- High performance, shielded, Micro-cavity structure
- Silicon substrate, 50Ω CPW output
- Au wire bonding, for MCM applications

Environmental Specifications


Operating Temperature	-55°C~+85°C
Storage Temperature	-55°C~+125°C
Max. Input Power	35dBm

Electrical Specifications(T_A=+25°C)

Parameter	Min.	Typ.	Max.	Unit
Center Freq. (f ₀)	-	8.7	-	GHz
Pass Band	7.5	-	9.95	GHz
Ripple in Pass band	-	-	1	dB
Insertion Loss @ f ₀	-	-	1.6	dB
Return Loss	14	-	-	dB
Out of band Attenuation	≥ 30@6.6GHz&10.7GHz		dB	
	≥ 40@6GHz&11.05GHz		dB	
Attenuation	≥ 60@DC~5.4GHz		dB	
	≥ 55@11.2~20GHz		dB	
Group Delay Variation	≤ 0.7@7.5~9.95GHz		ns	
Linear Phase	≤ ±18@7.5~9.95GHz		°	

S2P file name: SiMF8R7_2R5-7D2.s2p


Outline Drawing




Symbol	Value (mm)		
	Min.	Nominal	Max.
A	6.9	-	7.0
B	4.1	-	4.2

Typical Test Curves


Insertion Loss VS Frequency (T_A=25°C)

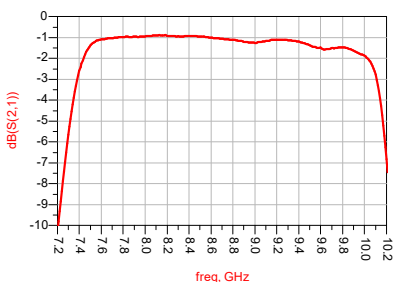


Insertion Loss & Return Loss VS Frequency (T_A=25°C)

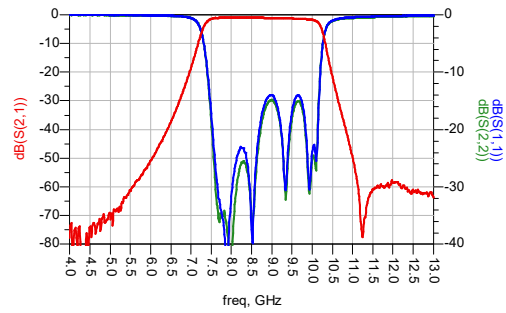

Broadband Insertion Loss VS Frequency (T_A=25°C)

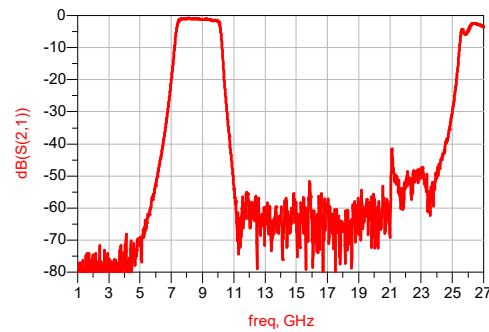


Recommended Assembly Diagrams

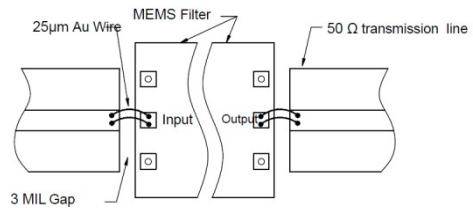

Application Notes:

1. The chip is back-metalized and can be die mounted with AuSn eutectic performs or with electrically conductive epoxy (for example ME8456).
2. The die should be assembled on carriers like Kovar or Mu-Cu which have same Coefficient of thermal expansion. (2.9ppm/°C) with Silicon, thickness 0.2mm max.
3. Handle the chips in a clean environment. DO NOT attempt to clean the chip using liquid cleaning systems.
4. Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers.
5. Recommended to use T structure as below for bonding.

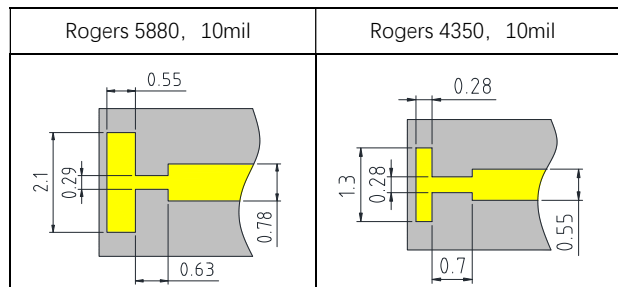

6. If you have any questions, please contact us.