Feature

- Precision MEMS process
- High performance, shielded, Micro-cavity structure
- Silicon substrate, 50Ω CPW output
- Au wire bonding, for MCM applications

Environmental Specifications

Operating Temperature	-55℃~+85℃
Storage Temperature	-55℃~+125℃
Max. Input Power	35dBm

Electrical Specifications(T_A=+25℃)

Parameter	Min.	Typ.	Max.	Unit
Center Freq. (f_0)	-	11	-	GHz
Pass Band	9.8	-	12.2	GHz
Ripple in Pass band	-	-	1	dB
Insertion Loss @ f_0	-	-	2.0	dB
Return Loss	12	-	-	dB
Out of band Attenuation	≥30@8.5GHz&12.9GHz			dB
	≥40@8.2GHz&13.1GHz			dB
	≥60@DC~7GHz			dB
	≥50@14~20GHz			dB
Group Delay Variation	≤1@9.8~12.2GHz			ns
Linear Phase	≤±10@9.8~12.2GHz			°

S2P file name: SiMF10R96_2R16-7D2.s2p

Outline Drawing



Symbol	Value (mm)		
	Min.	Nominal	Max.
A	6.9	-	7.0
B	3.4	-	3.5

Typical Test Curves

Insertion Loss VS Frequency (T_A=25℃)

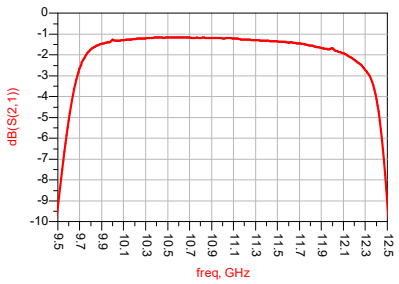

Insertion Loss & Return Loss VS Frequency (T_A=25℃)

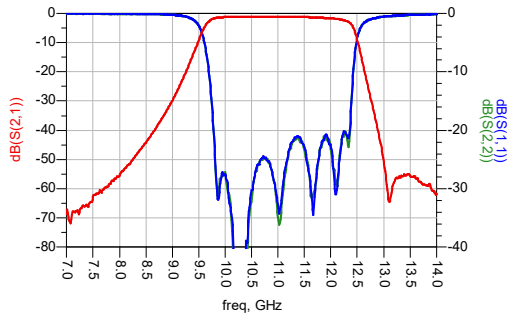

Broadband Insertion Loss VS Frequency (T_A=25℃)

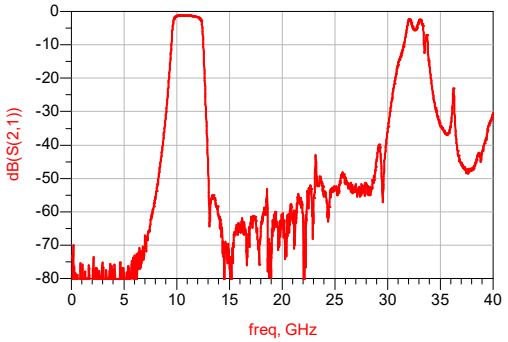

Recommended Assembly Diagrams

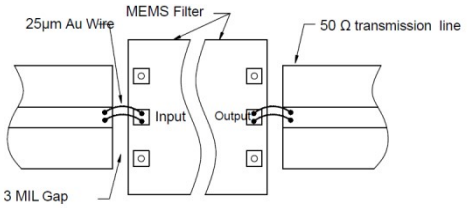

Application Notes:

1. The chip is back-metalized and can be die mounted with AuSn eutectic performs or with electrically conductive epoxy (for example ME8456).

2. The die should be assembled on carriers like Kovar or Mu-Cu which have same Coefficient of thermal expansion. (2.9ppm/℃) with Silicon, thickness 0.2mm max.

3. Handle the chips in a clean environment. DO NOT attempt to clean the chip using liquid cleaning systems.

4. Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers.

5. Recommended to use T structure as below for bonding.

Rogers 5880, 10mil	Rogers 4350, 10mil
	

6. If you have any questions, please contact us.