
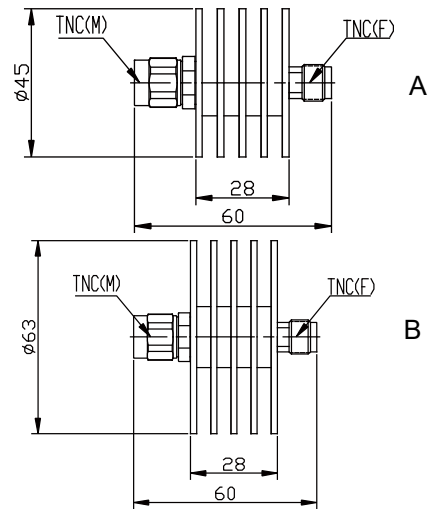


Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

TNC serial coaxial fixed attenuators' average power 2-200W, frequency range from DC-18GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

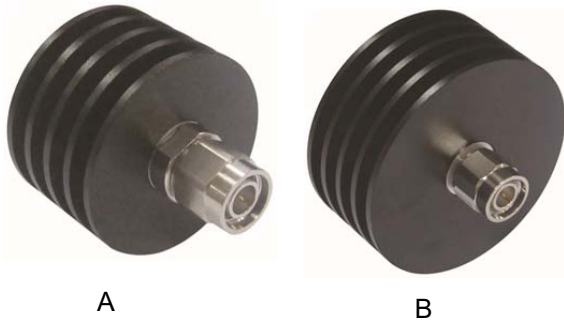

MECHANICAL SPECIFICATIONS	
Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Aluminum, Black Anodize
Temp Range	-55° C ~ +85° C
Dimensions	A:Ø45×60mm; B:Ø63×60mm
Weight	A:80g ; B:125g

RoHS Compliant: Yes

## ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
		10	20	30	40	
SAT26B25XX04	DC-4	±0.4	±0.5	±0.5	±0.5	1.15
SAT26B25XX08	DC-8	±0.4	±0.5	±0.5	±0.5	1.20
SAT26B25XX12	DC-12.4	±0.5	±0.8	±0.8	±0.8	1.25
SAT26B25XX18	DC-18	±1.0	±1.0	±1.0	±1.0	1.35

Note: XX refer to attenuation value in dB

**NOMINAL IMPEDANCE:** 50Ω

**AVERAGE POWER:** 25W average to 25°C ambient temperature, derated linearly to 2.5W @ 125°C.

**PEAK POWER:** 1KW (5μs pulse width with 2.5% duty cycle)

**CONNECTOR TYPE:** TNC

## Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available for other special attenuation value & accuracy.