


Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

N serial coaxial fixed attenuators' average power 10W-10KW, frequency range DC-26.5GHz and feature wide frequency band, low VSWR, flatness attenuation value, excellent capacity in anti-pulse and anti-burnout.

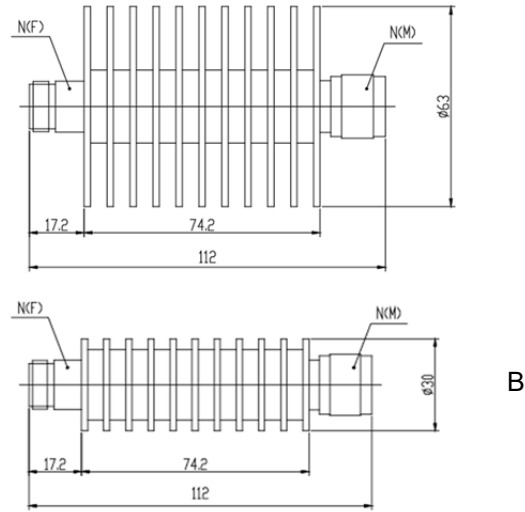

MECHANICAL SPECIFICATIONS	
Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Aluminum, Black Anodize
Temp Range	-55° C ~ +125° C
Dimensions	130×60×60mm
Weight	510g

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)						Max VSWR
		3/6	10	20	30	40	50	
SAT27B60XX02G	DC-2.5	±0.3	±0.3	±0.3	±0.3	±0.3	±0.5	1.10
SAT27B60XX04G	DC-4	±0.3	±0.3	±0.3	±0.4	±0.5	±0.5	1.15
SAT27B60XX06G	DC-6	±0.4	±0.4	±0.4	±0.5	±0.75	±0.75	1.20
SAT27B60XX08G	DC-8	±0.6	±0.6	±0.6	±0.75	±1.0	±1.0	1.30
SAT27B60XX10G	DC-10	±0.7	±0.8	±0.8	±1.0	±1.2	±1.2	1.35

Note: XX refer to attenuation value in dB

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 60W average to 25°C ambient temperature, derated linearly to 6W @ 125°C.

PEAK POWER: 5KW (5μs pulse width with 1.2% duty cycle)

CONNECTOR TYPE: N

Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available for other special attenuation value & accuracy.