
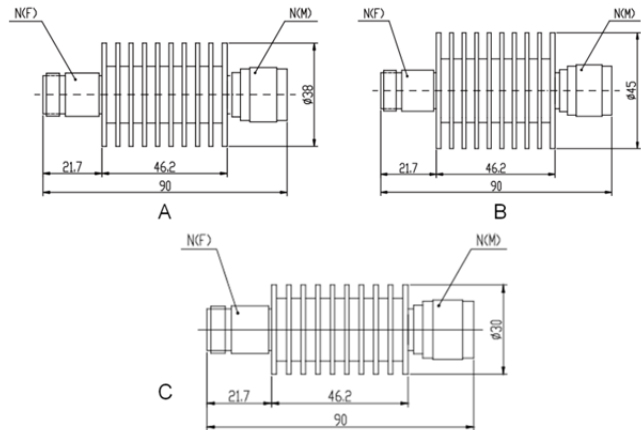


Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

N serial coaxial fixed attenuators' average power 10W-10KW, frequency range DC-26.5GHz and feature wide frequency band, low VSWR, flatness attenuation value, excellent capacity in anti-pulse and anti-burnout.

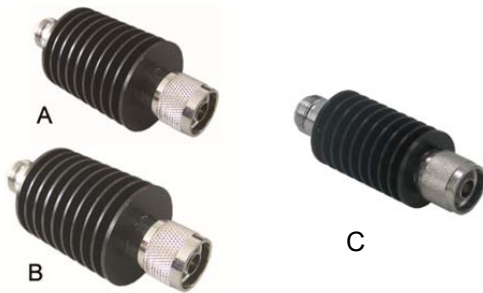

MECHANICAL SPECIFICATIONS	
Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Aluminum, Black Anodize
Temp Range	-55° C ~ +125° C
Dimensions	A:Ø38×90mm; B:Ø45×90mm C:Ø30×90mm
Weight	A:140g; B:150g;C:125g

RoHS Compliant: Yes

### ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)								Max VSWR
		3	6	10	20	30	40	50	60	
SAT27B25XX08GH	DC-8	±0.5	±0.5	±0.5	±0.5	±0.5	±0.6	±1.0	±1.0	1.25
SAT27B25XX12GH	DC-12.4	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	±1.2	±1.2	1.35
SAT27B25XX18GH	DC-18	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	/	/	1.40

Note: XX refer to attenuation value in dB

**NOMINAL IMPEDANCE:** 50Ω

**AVERAGE POWER:** 25W average to 25°C ambient temperature, derated linearly to 2.5W @ 125°C

**PEAK POWER:** 1KW (5μs pulse width with 2.5% duty cycle)

**CONNECTOR TYPE:** N

### Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available for other special attenuation value & accuracy.