



Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

N serial coaxial fixed attenuators' average power from 10W-10KW, frequency range from DC-26.5GHz and feature wide frequency band, low VSWR, flatness attenuation value, excellent capacity in anti-pulse and anti-burnout

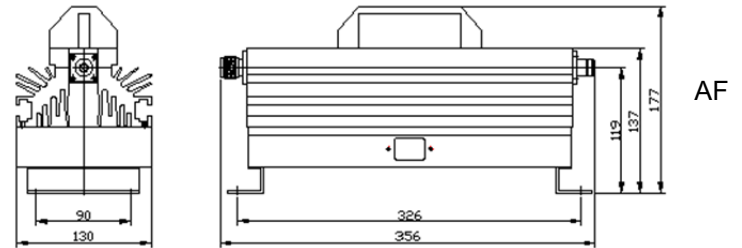

AF

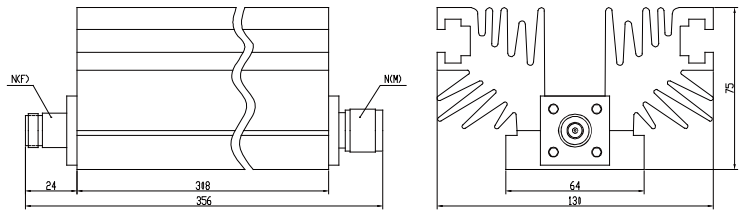

AF

MECHANICAL SPECIFICATIONS	
Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Aluminum, Black Anodize
Temp Range	-55° C ~ +125° C
Dimensions	356×130×75mm AF:356×130×177mm
Weight	4.3Kg; AF:5Kg

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
		20	30	40	50	
SAT27B400XX04W	DC-4	/	/	±0.5	±0.5	1.25
SAT27B400XX06W	DC-6	/	/	±0.75	±0.75	1.30
SAT27B400XX08W	DC-8	/	/	±1.0	±1.0	1.45
SAT27B400XX10W	DC-10	/	/	±1.0	±1.0	1.45

Note: XX refer to attenuation value in dB

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 400W average to 25°C ambient temperature, derated linearly to 40W @ 125°C

PEAK POWER: 5KW (5μs pulse width with 8% duty cycle)

CONNECTOR TYPE: N

Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available for other special attenuation value & accuracy.