


Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

2.92mm coaxial fixed attenuators' average power 20W, frequency range from DC-40GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

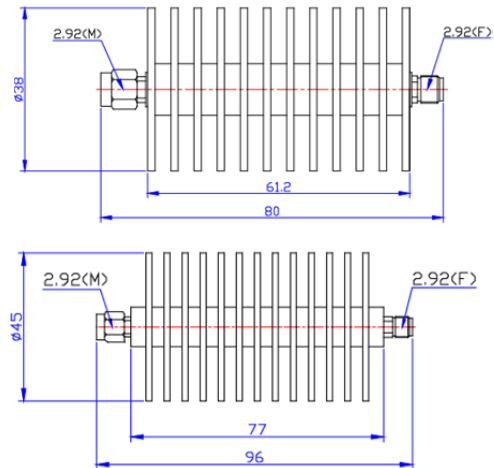

MECHANICAL SPECIFICATIONS	
Connectors	Stainless Steel Passivated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Aluminum, Black Anodize
Temp Range	-55°C ~ +100°C
Dimensions	<40dB: Ø38×80mm ≥40dB: Ø45×96mm
Weight	<40dB: 80g    ≥40dB: 140g

RoHS Compliant: Yes

### ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
		10	20	30	40	
SAT36D20XX26	DC-26.5	-1.0/+2.0	-1.0/+2.0	-1.0/+2.0	-1.0/+2.0	1.30
SAT36D20XX32	DC-32	-1.0/+2.0	-1.0/+2.0	-1.0/+2.0	-1.0/+2.0	1.40
SAT36D20XX40	DC-40	-1.5/+3.0	-1.0/+2.0	-1.0/+2.0	-1.0/+2.0	1.40

Note: XX refer to attenuation value in dB

**NOMINAL IMPEDANCE:** 50Ω

**AVERAGE POWER:** 20W average to 25°C ambient temperature, derated linearly to 0.5W @ 125°C

**PEAK POWER:** 0.2KW (5μs pulse width with 5% duty cycle)

**CONNECTOR TYPE:** 2.92mm

### Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available for other special attenuation value & accuracy.