


Coaxial fixed terminations absorb RF& microwave energy and are commonly used as dummy loads of antenna and transmitter. They are also used as match ports in many multiport microwave device such as circulator and directional coupler to make these ports which are not involved in the measurement be terminated in their characteristic impedance in order to ensure an accurate measurement.

2.92mm serial high power coaxial fixed termination's average power 2W-10KW, frequency range dc-40GHz and feature wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout.

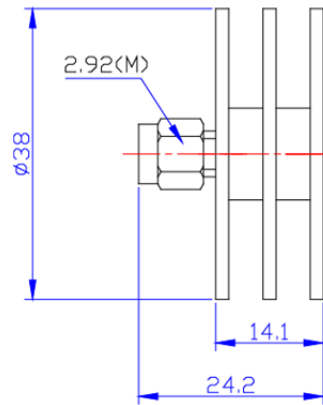

MECHANICAL SPECIFICATIONS	
Connectors	Stainless Steel Passivated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Aluminum, Black Anodize
Temp Range	-55° C ~ +85° C
Dimensions	M:Ø38×24.2mm F:Ø38×22.2mm
Weight	30g

RoHS Compliant: Yes

### ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Max VSWR
ST36XD-50-5W-26	DC-26.5	1.20
ST36XD-50-5W-32	DC-32	1.35
ST36XD-50-5W-36	DC-36	1.35
ST36XD-50-5W-40	DC-40	1.35

Note: X refer to connector Gender, 1 means Male, 2 means Female

**NOMINAL IMPEDANCE:** 50Ω

**AVERAGE POWER:** 5W average to 25°C ambient temperature, derated linearly to 0.5W @ 125°C

**PEAK POWER:** 0.2KW (5μs pulse width with 2.5% duty cycle)

**CONNECTOR TYPE:** 2.92mm

### Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available