


Coaxial fixed attenuators are used in absorbing energy of transmission line, expanding power range and controlling power level, they are also used in accurately measuring power or spectrum of RF microwave transmitters accompany with small power meter, comprehensive tester or spectrum analyzer.

2.4mm coaxial fixed attenuators' average power 20W, frequency range from DC-40GHz and feature wide frequency band, low VSWR, flatness attenuation value and excellent capacity in anti-pulse and anti-burnout etc.

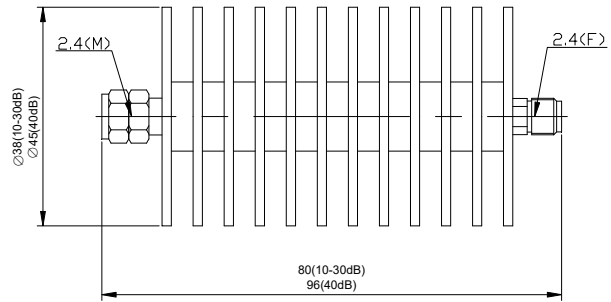

MECHANICAL SPECIFICATIONS	
Connectors	Stainless Steel Passivated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Aluminum
Temp Range	-55°C ~ +100°C
Dimensions	10-30dB: Ø38×80mm 40dB: Ø45×96mm
Weight	10-30dB: 80g 40dB: 140g

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
		10	20	30	40	
SAT38D20XX26	DC-26.5	-1.0/+2.0	-1.0/+2.0	-1.0/+2.0	-1.0/+2.0	1.30
SAT38D20XX32	DC-32	-1.0/+2.0	-1.0/+2.0	-1.0/+2.0	-1.0/+2.0	1.40
SAT38D20XX40	DC-40	-1.5/+3.0	-1.0/+2.5	-1.0/+2.5	-1.0/+2.5	1.40

Note: XX refer to attenuation value in dB

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 20W average to 25°C ambient temperature, derated linearly to 0.5W @ 125°C

PEAK POWER: 0.2KW (5μs pulse width with 10% duty cycle)

CONNECTOR TYPE: 2.4mm

Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available for other special attenuation value & accuracy.