


Coaxial fixed terminations absorb RF& microwave energy and are commonly used as dummy loads of antenna and transmitter. They are also used as match ports in many multiport microwave device such as circulator and directional coupler to make these ports which are not involved in the measurement be terminated in their characteristic impedance in order to ensure an accurate measurement.

SMA coaxial fixed termination's average power 2W, frequency range DC-26.5GHz and feature wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout.

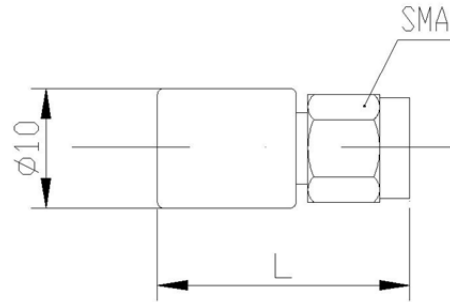

MECHANICAL SPECIFICATIONS		
Connectors	Brass Nickel Plated	
Male Pin	Brass Gold Plated	
Female Pin	Beryllium Copper Gold Plated	
Housing	Aluminum	
Temp Range	-55° C ~ +125° C	
Dimensions	Ø10×L mm	M: L=21.5
		F: L=20
Weight	5g	

RoHS Compliant: Yes

ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range (GHz)	Max VSWR
ST18XB-50-2W-18	DC-18	1.20
ST18XB-50-2W-26	DC-26.5	1.30

Note: X refer to connector Gender, 1 means Male, 2 means Female

NOMINAL IMPEDANCE: 50Ω

AVERAGE POWER: 2W average to 25°C ambient temperature, derated linearly to 0.2W @ 125°C

PEAK POWER: 0.25KW (5μs pulse width with 0.8% duty cycle)

CONNECTOR TYPE: SMA

Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available