


Inset terminations are used in quantitatively absorbing energy of RF and microwave system, they are commonly used as dummy loads of antenna and transmitter.

N serial wide-band Inset termination's average power from 50W-150W, frequency range from DC-18GHz and the features include wide frequency band, low VSWR, excellent capacity in anti-pulse and anti-burnout etc.

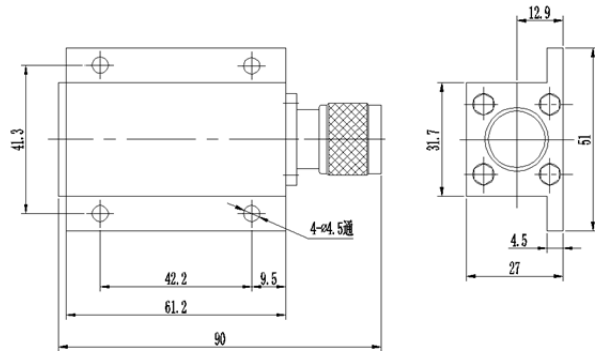

MECHANICAL SPECIFICATIONS	
Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Housing	Aluminum
Temp Range	-55° C ~ +125° C
Dimensions	90×51×27mm
Weight	190g

RoHS Compliant: Yes

#### ELECTRICAL SPECIFICATIONS

Model Number	Frequency Range (GHz)	Max VSWR
SNT271B-50-75W-03W	DC-3	1.10
SNT271B-50-75W-06W	DC-6	1.20
SNT271B-50-75W-08W	DC-8	1.25
SNT271B-50-75W-10W	DC-10	1.35
SNT271B-50-75W-18W	DC-18	1.55

**NOMINAL IMPEDANCE:** 50Ω

**AVERAGE POWER:** 75W average to 25°C ambient temperature, derated linearly to 7.5W @ 125°C

**PEAK POWER:** 10KW (5μs pulse width with 0.75% duty cycle)

**CONNECTOR TYPE:** N(M)

#### Notes:

1. Dimensions Tolerance ±5%
2. Custom designs available