


**Description: SMPM Female To 2.4mm Male Adapter**

**Outline drawing:**

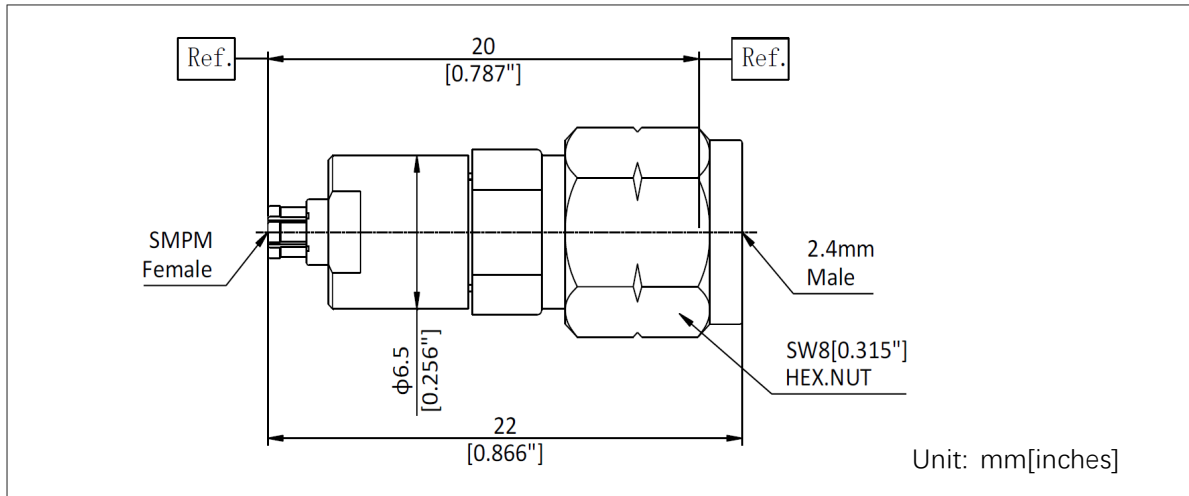

**Type**

	Connector 1	Connector 2
Port Type	SMPM Female	2.4mm Male
Impedance	50Ω	50Ω
Body Style	Straight	

**Material and Plating**

Body	SUS303,Polished&Passivated; SMPM:Beryllium Copper Gold Plated
Center conductor	Beryllium Copper Gold Plated
Dielectric	PEEK
Nut	Connector 1:N/A; Connector 2: SUS303,Polished & Passivated

**Electrical Specifications**

Frequency Range	DC-50GHz
Max VSWR	1.30:1(max)

**Mechanical Specifications**

	Connector 1	Connector 2
Durability	> 2000 Cycles	> 2000 Cycles
Recommended Torque	N/A	0.9 Nm

**Environmental Data**

Operating Temperature Range	-55~+165°C
2002/95/EC(RoHS)	Compliant