


Description: 1.0mm Female To 1.0mm Female Adapter

Outline drawing:

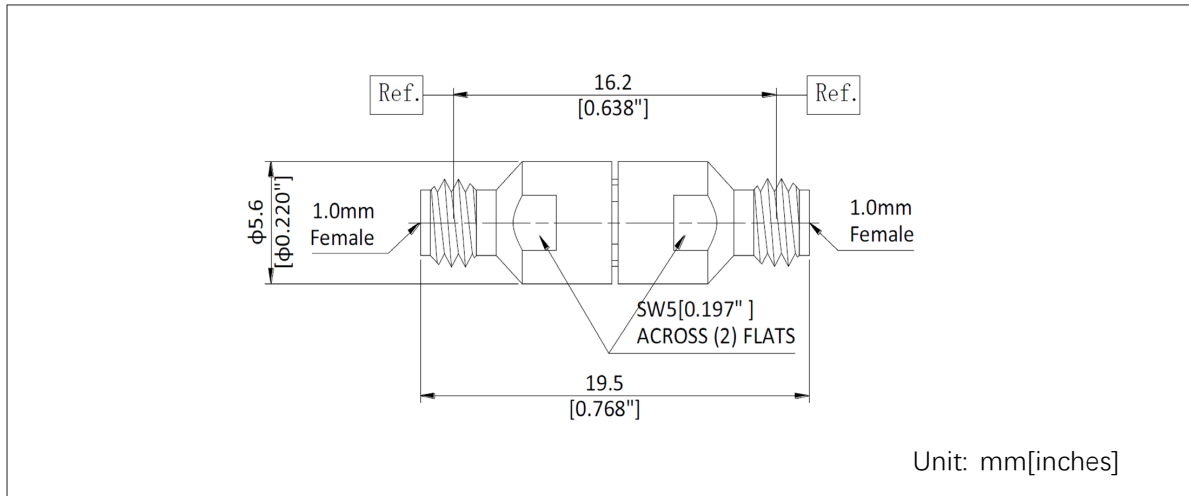

Type

	Connector 1	Connector 2
Port Type	1.0mm Female	1.0mm Female
Impedance	50Ω	50Ω
Body Style	Straight	

Material and Plating

Body	Beryllium Copper Gold Plated
Center conductor	Beryllium Copper Gold Plated
Dielectric	CPS

Electrical Specifications

Frequency Range	DC-110GHz
Max VSWR	1.35:1(max)

Mechanical Specifications

	Connector 1	Connector 2
Durability	> 2000 Cycles	> 2000 Cycles
Recommended Torque	0.45 Nm	0.45 Nm

Environmental Data

Operating Temperature Range	-55~+100°C
2002/95/EC(RoHS)	Compliant