


Description: BNC Male To BNC Male Adapter

Outline drawing:

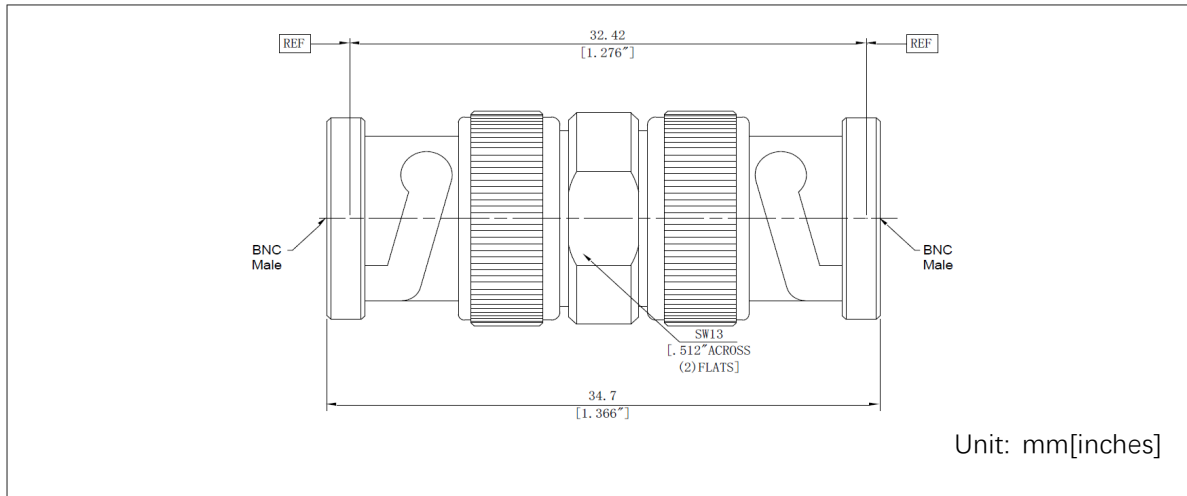

Type

	Connector 1	Connector 2
Port Type	BNC Male	BNC Male
Impedance	50Ω	50Ω
Body Style	Straight	

Material and Plating

Body	SUS303, Polished & Passivated
Center conductor	Beryllium Copper Gold Plated
Dielectric	PEI&PTFE
Nut	Connector 1: Brass,Nickel Plated Connector 2: Brass,Nickel Plated

Electrical Specifications

Frequency Range	DC-4GHz
Max VSWR	1.10:1(max)

Mechanical Specifications

	Connector 1	Connector 2
Durability	> 2000 Cycles	> 2000 Cycles
Recommended Torque	N/A	N/A

Environmental Data

Operating Temperature Range	-55~+165°C
2002/95/EC(RoHS)	Compliant