

## Features

Ultra Wide Band

Low Insertion Loss

High Isolation

Rush Delivery

Fast Response

Customization Available Upon Request


## Electrical Specifications

Parameter		Min.	Typ.	Max.	Unit
Frequency		375	-	6000	MHz
Insertion Loss		-	-	2	dB
Isolation		11 min.@ 0.375-0.5GHz 19 min.@ 0.5-6GHz			dB
Input VSWR		-	-	1.7	--
Output VSWR		-	-	1.4	--
Amplitude Unbalance		-	-	±0.3	dB
Phase Unbalance		-	-	±4	deg
Power Rating	Forward Power	30			W
	Reverse Power	2			W
Impedance		50			Ohms
Weight		/			Ounce
Input / Output Connectors		N-FEMALE			
Finish		Black Paint			

## Environmental Specifications

Operating Temperature	-55 to +105°C
Storage Temperature	-55 to +125°C
Altitude	30,000ft (Epoxy Sealed Controlled environment)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C 95% RH at 40°C
Shock	20G for 11msec half sinewave, 3 axis both directions

### Outline Drawing

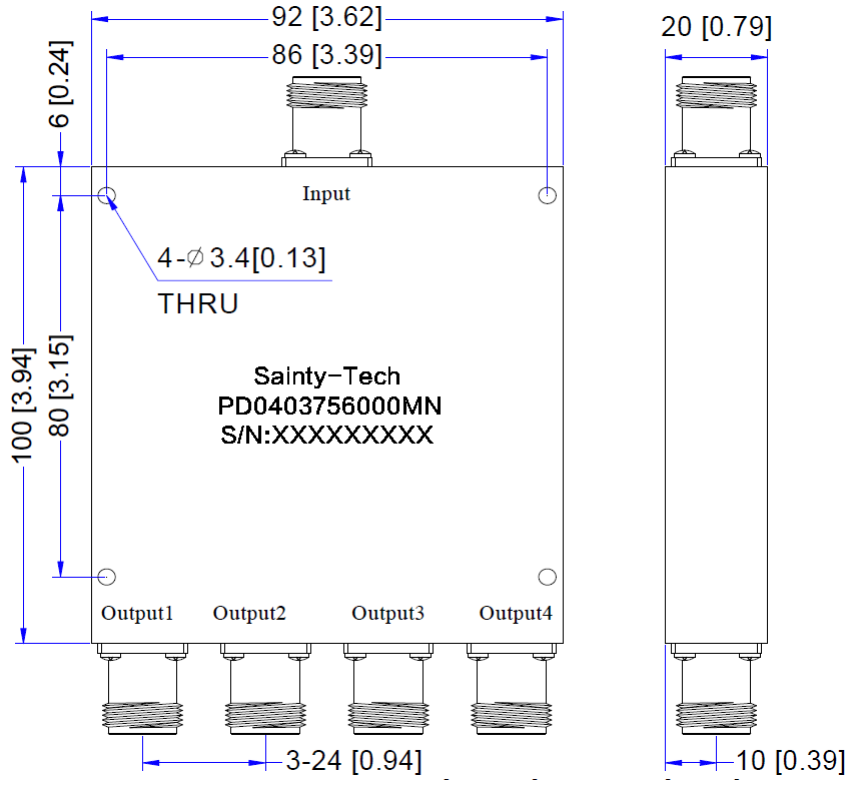

Unit: mm [inches]

Outline tolerance: ±0.2[0.008]