


Performance

- Frequency: 0.1~20GHz
- Type: 1、2、3、4、5、6
7、8、10、15、20dB
- Power Handling: 10W

Chip size

BW068: 0.70*1.00*0.1mm
 BW069: 1.20*1.00*0.1mm
 BW070~073: 1.70*1.00*0.1mm
 BW074: 1.70*0.90*0.1mm
 BW075: 1.90*0.90*0.1mm
 BW076: 1.70*1.30*0.1mm
 BW077: 1.90*1.10*0.1mm
 BW078: 1.90*1.20*0.1mm

Function Diagram

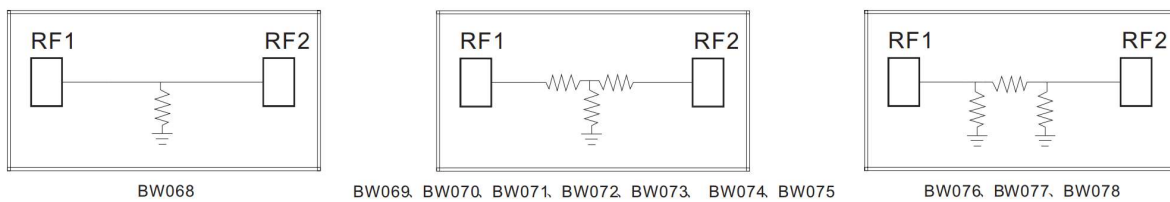

Electrical Specifications (Ta=+25°C, 50Ω system)

Part Number	Frequency (GHz)	Attenuation (dB)	Return Loss (dB)	Attenuation Flatness (dB)
BW068	0.1~20	1	15	±0.3
BW069	0.1~20	2	15	±0.3
BW070	0.1~20	3	15	±0.3
BW071	0.1~20	4	15	±0.3
BW072	0.1~20	5	15	±0.3
BW073	0.1~20	6	15	±0.3
BW074	0.1~20	7	15	±0.3
BW075	0.1~20	8	15	±0.3
BW076	0.1~20	10	15	±0.5
BW077	0.1~20	15	15	±0.5
BW078	0.1~20	20	15	±0.5

Test Curve

