


### Performance

- Frequency: 5~6GHz
- Typical Signal Gain: 32dB
- Typical Pout: 49dBm@28V
- PAE: 48%
- Bias: 28V, -2.0V (Typ.)
- Mode: CW operation is not allowed
- Technology: 0.25um HEMT
- Size: 3.7mm\*5.5mm\*0.08mm

### Function Diagram

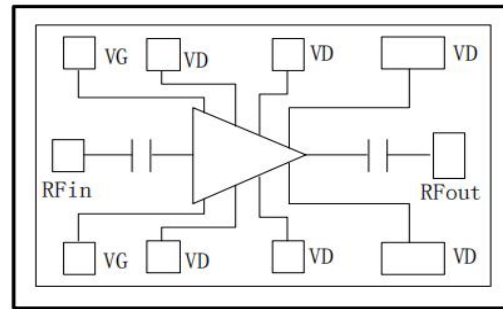


### Electrical Specifications (TA=25°C, Vd=28V, Idq=3.5A, F: 5~6GHz, PW=1ms, D.C=10%)


Symbol	Parameter	Min	Typical	Max	Unit
G	Small Signal Gain	-	32	-	dB
Gp	Power Gain	-	26	-	dB
Pout	Saturated Power	-	49	-	dBm
PAE	Power Added Efficiency	-	48	-	%

### Test Curves


Small Signal Gain

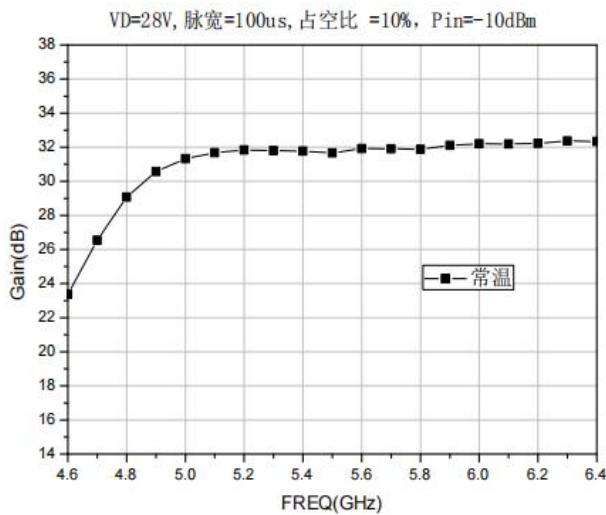

VSWRin

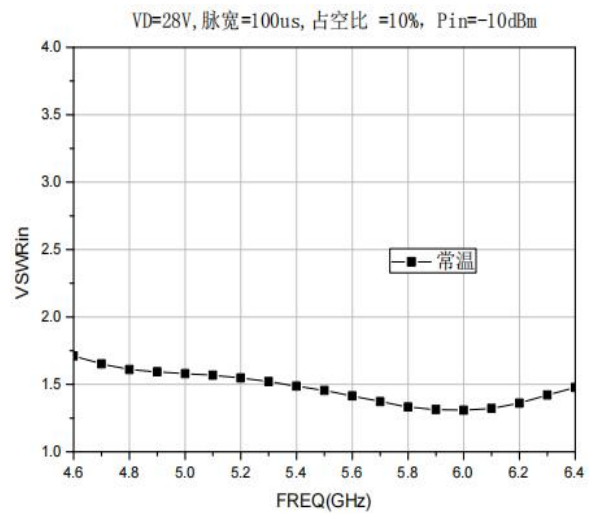


Pout@ Different Temp.

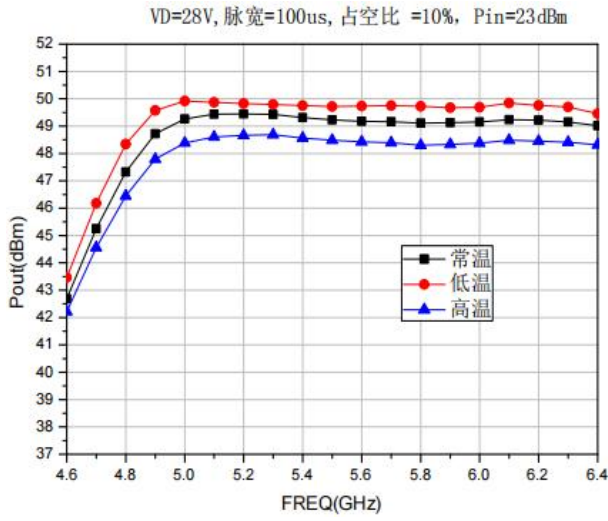


Pout

PAE@ Different Temp.

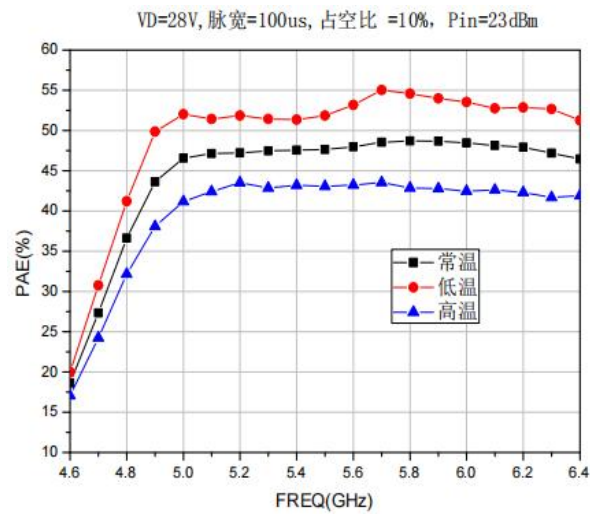


PAE

脉宽=100us, 占空比 =10%, Pin=23dBm

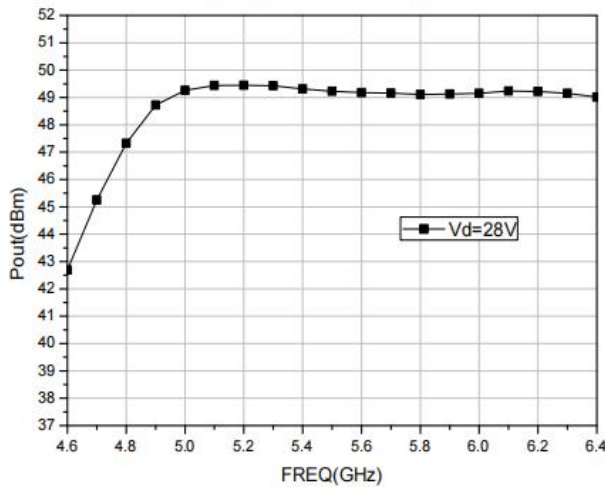


Id

脉宽=100us, 占空比 =10%, Pin=23dBm

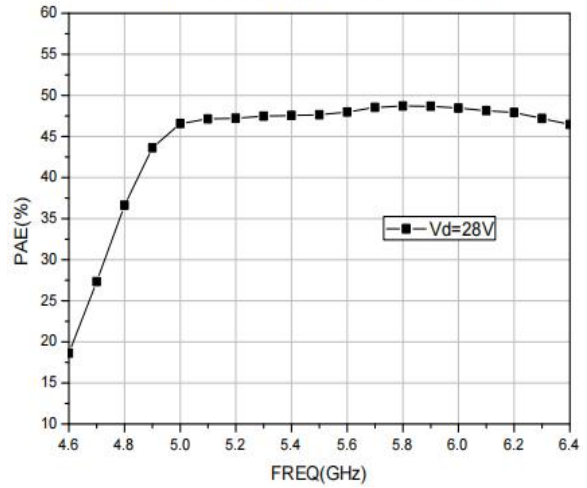


Ig

脉宽=100us, 占空比 =10%, Pin=23dBm

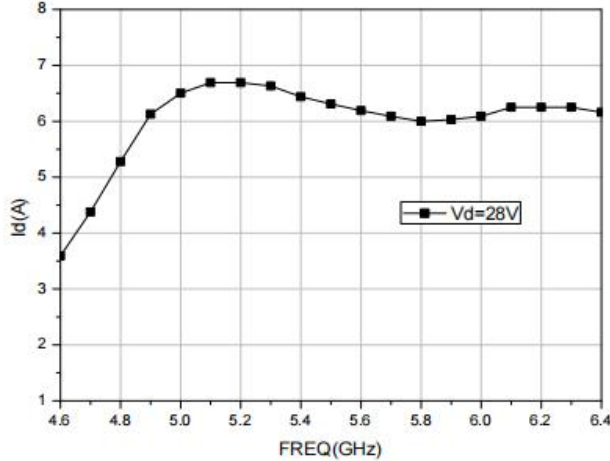


脉宽=100us, 占空比 =10%, Pin=23dBm

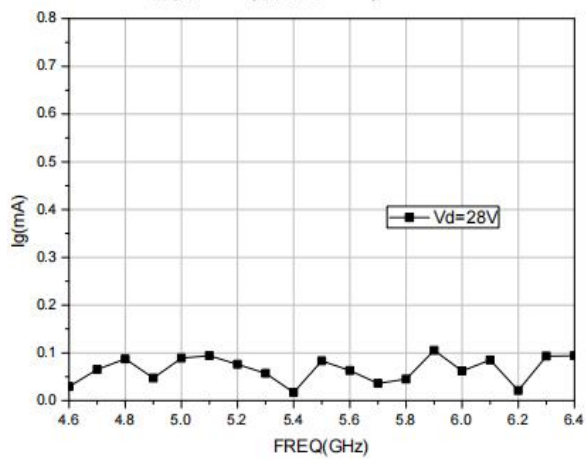





**Absolute Max Ratings (TA=25°C)**

Symbol	Parameter	Value	Remark
Vd	Drain Voltage	32V	
Id	Drain Current	8.0A	
Vg	Grid Voltage	-10V	
Ig	Grid Current	10mA	
Pd	DC Power	200W	
Pin	Input Power	27dBm	
Tch	Channel Temperature	225°C	
Tm	Mounting Temperature	310°C	1 min, N2 Protection
Tstg	Storage Temperature	-55~175°C	

Exceeding any one or combination of these limits may cause permanent damage.

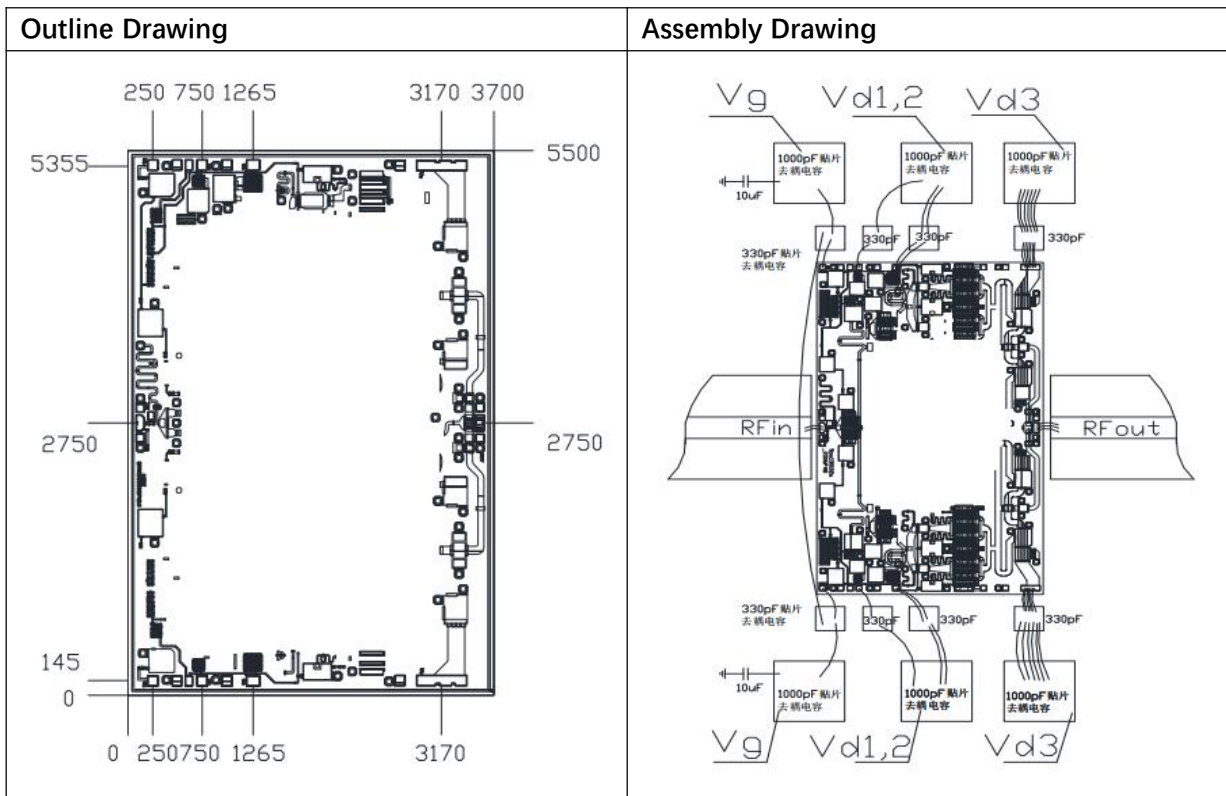

### Pads Definition

Pad	Description	Equivalent Circuit
RFin	RF Signal input, connect to 50ohm system, block capacitor is needed if there's external DC applied on this pad.	
RFout	RF Signal output, connect to 50ohm system, no need block capacitor.	
VG	Amp gate bias, external 330pF, 1000pF capacitor is needed	
VD1、VD2、VD3	Amp drain bias, external 330pF, 1000pF capacitor is needed	
GND	Bottom must connect to RF and DC ground	