


### Performance


- Frequency: 24~28GHz
- Typical Signal Gain: 29dB
- Typical Pout: 33dBm@20V
- Typical PAE: 35%
- Bias: 20V, -2.2V, 0.2A (Typ.)
- Mode: CW
- Size: 2.8\*1.0mm\*0.05mm

### Test Curves


Pout@ Different Pin

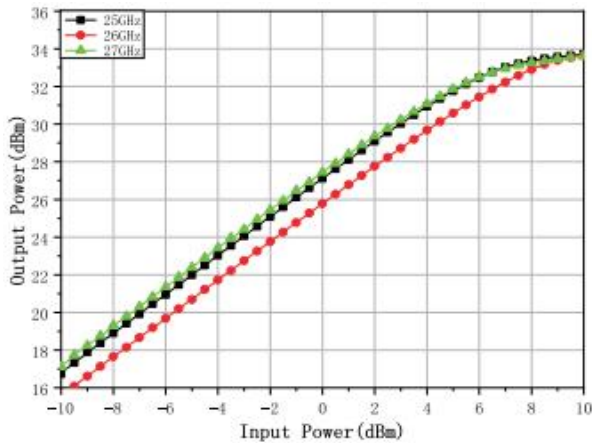

PAE@ Different Pin

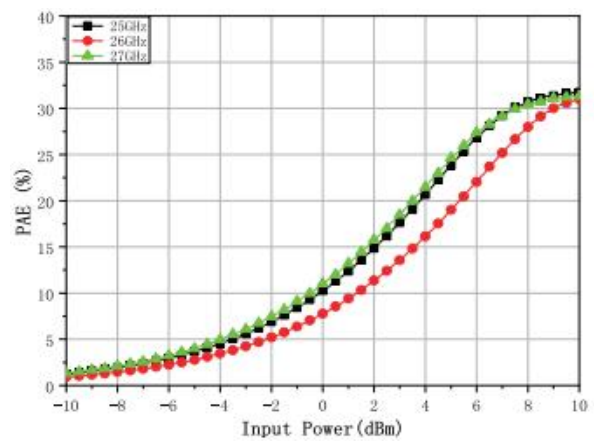

IM3 VS pout/per tone

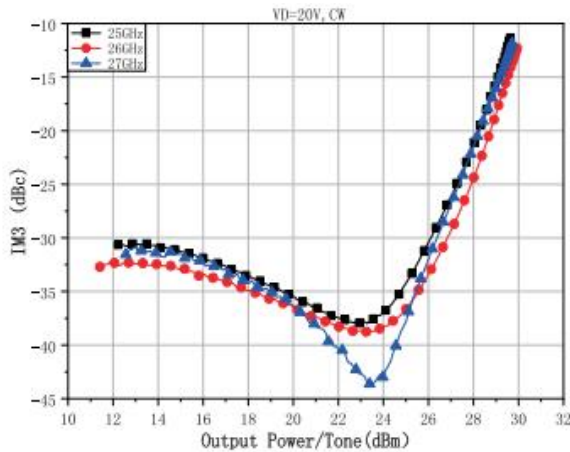

Small Signal Gain

