


Performance


- Frequency: 25~31GHz
- Typical Signal Gain: 24dB
- Typical Pout: 41dBm@20V
- Typical PAE: 28%
- Bias: 20V, -2.3V, 1A (Typ.)
- Mode: CW
- Size: 3.6*3.3mm*0.05mm
- Thermal Resistance: 2.5°C/W

Test Curves


Pout@ Different Pin

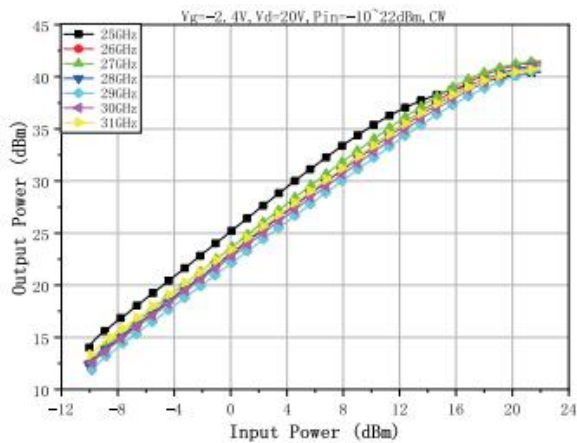

PAE@ Different Pin

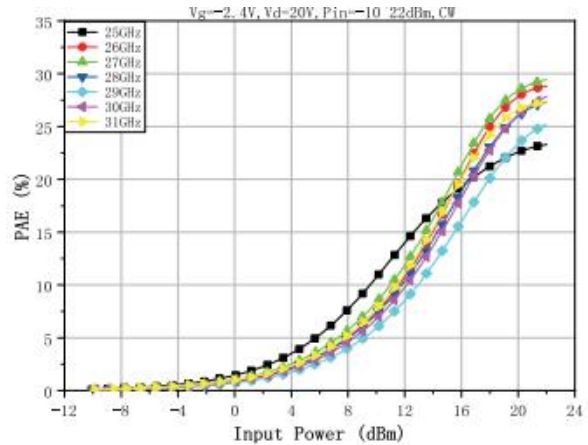

IM3 VS pout/per tone

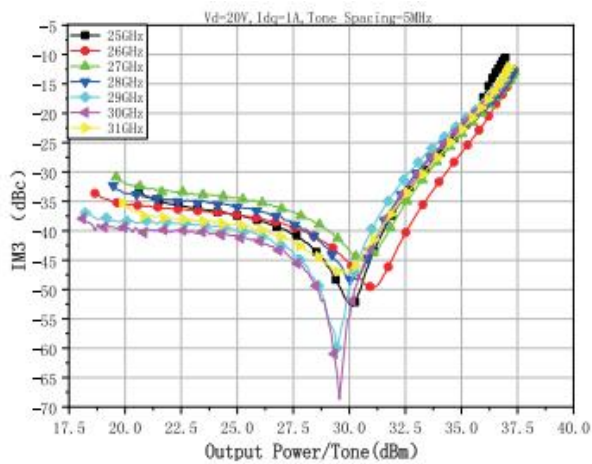

Small Signal Gain

