Electrical Specification

ITEM		SPEC	Unit
1	Center Frequency [fo]	1591.0	MHz
2	Bandwidth [BW]	fo ±30.0[1561~1621]	MHz
3	Insertion Loss in BW	1.2 max.	dB
4	Ripple in BW	0.6 max.	dB
5	VSWR in BW	2.0 :1 max.	Ratio
6	In/Out Impedance	50 Ω	
7	Attenuation [Absolute Value]	16.0 dB min. @fo – 140MHz	
		11.0 dB min. @fo + 140MHz	
8	Operation Temperature Range	-40℃ to +85℃	
9	Measurement Jig	WF4DA	

Outline Drawing

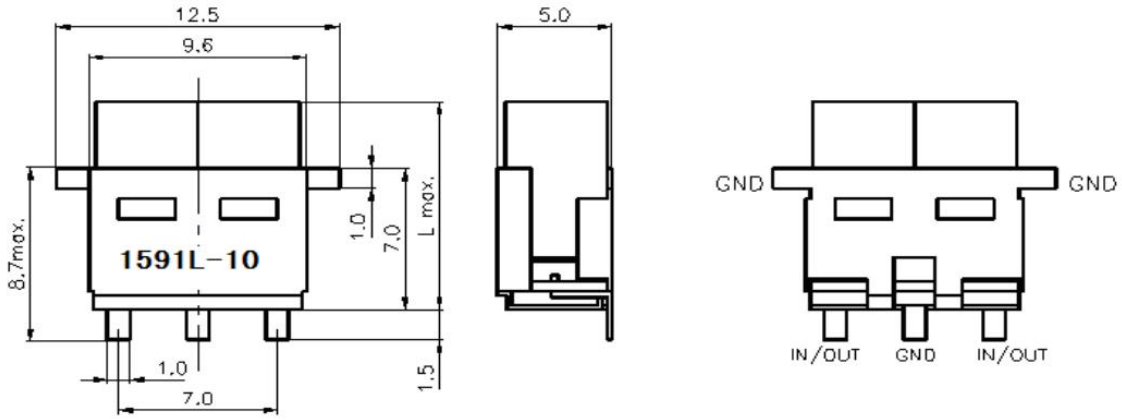

L=12.5mm max.

Unit: mm