

Performance


- Technology: 0.25um Power GaN HEMT
- Frequency: 11.2~11.8GHz
- Typical Pout : 48dBm
- Typical Gain: 7dB
- Typical PAE: 33%
- Bias: 32V/-2~-3V
- Package: Metal Ceramic



Electrical Specifications (TA=25°C,Vd=32V,Idq=0.6A,PL=100us,D.C=10%,F:11.2~11.8GHz)

Symbol	Parameter	Min	Typical	Max	Unit
Pout	Output Power	-	48	-	dBm
Gp	Power Gain	-	7	-	dB
η_{add}	Power Added Efficiency	-	33	-	%
ΔGp	Gain Flatness	-0.8	-	+0.8	dB


Test Curves

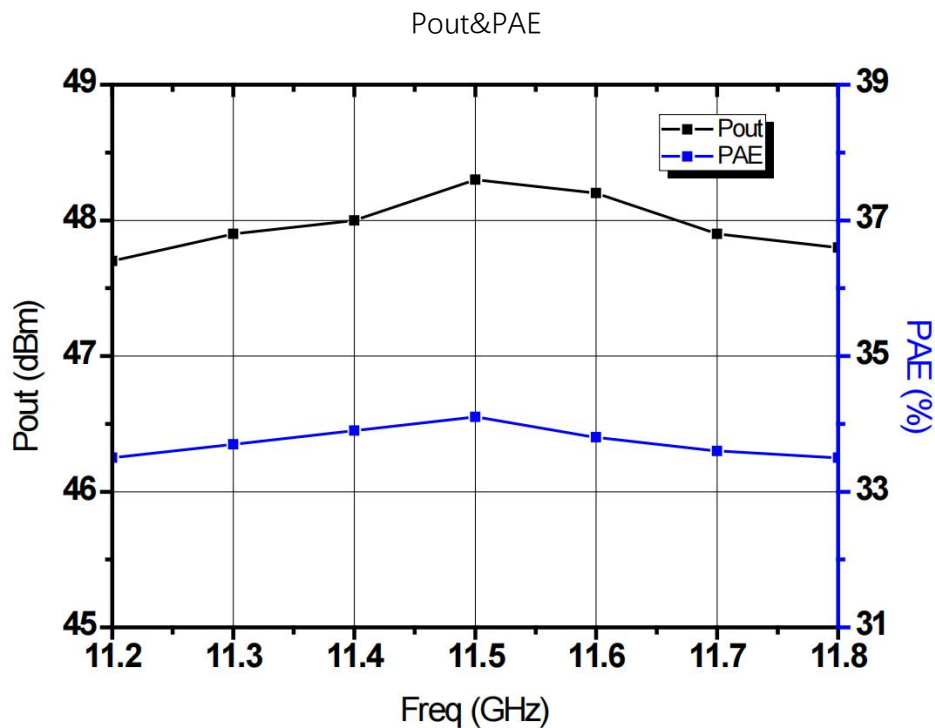

Absolute Max Ratings (T_A=25°C)

Symbol	Parameter	Value	Remark
V _d	Drain Voltage	40V	
V _g	Grid Voltage	-5V	
P _d	DC Dissipation	125W	25°C
T _{ch}	Channel Temperature	225°C	【1】
T _m	Mounting Temperature	300°C	1 min, N ₂ Protection
T _{stg}	Storage Temperature	-55~175°C	

【1】 Exceeding any one or combination of these limits may cause permanent damage.

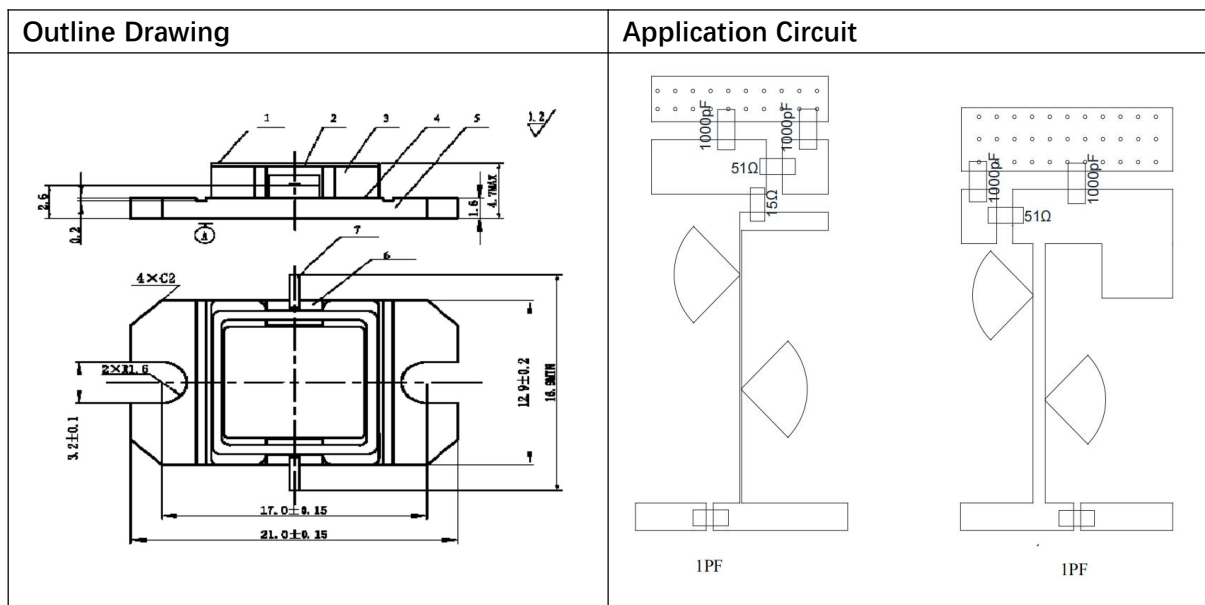

Note:

- (1) This product is an internal matching tube, and the input and output impedance values are both 50 ohms;
- (2) Please strictly follow the order of adding negative electricity first and then positive electricity in the power-on sequence. When de-energizing, first reduce the drain voltage and then reduce the gate voltage;
- (3) This product is a high-power device, and attention should be paid to heat dissipation during use. The higher the case temperature, the shorter the service life, and the operating temperature should not be higher than 80 degrees;
- (4) This product is an electrostatic sensitive device. It is necessary to pay attention to electrostatic protection during storage and use, and it needs to be well grounded when using it.