

Performance

- Technology: 0.25um Power GaN HEMT
- Frequency: 0.03~0.9GHz
- Typical Pout : $\geq 53\text{dBm(CW)}$
- Typical Gain: $\geq 13\text{dB}$
- Typical PAE: $\geq 56\%$
- Bias: 40V/-2.6~-1.6V@1.5A
- Package: Carrier, non packaged




Electrical Specifications ($T_A=25^\circ\text{C}$, $V_d=40\text{V}$, $I_{dq}=1.5\text{A}$, $F: 0.03\sim 0.9\text{GHz}$, $P_{in}=40\text{dBm}$)

Symbol	Parameter	Min	Typical	Max	Unit
Pout	Output Power	53.6	-	-	dBm
Gp	Power Gain	13.6	-	-	dB
η_{add}	Power Added Efficiency	56	-	-	%
ΔGp	Gain Flatness		-	± 0.8	dB
Rth	Thermal Resistance	-	0.5	-	$^\circ\text{C/W}$

Test Curves

Pout、 η_d &Freq.

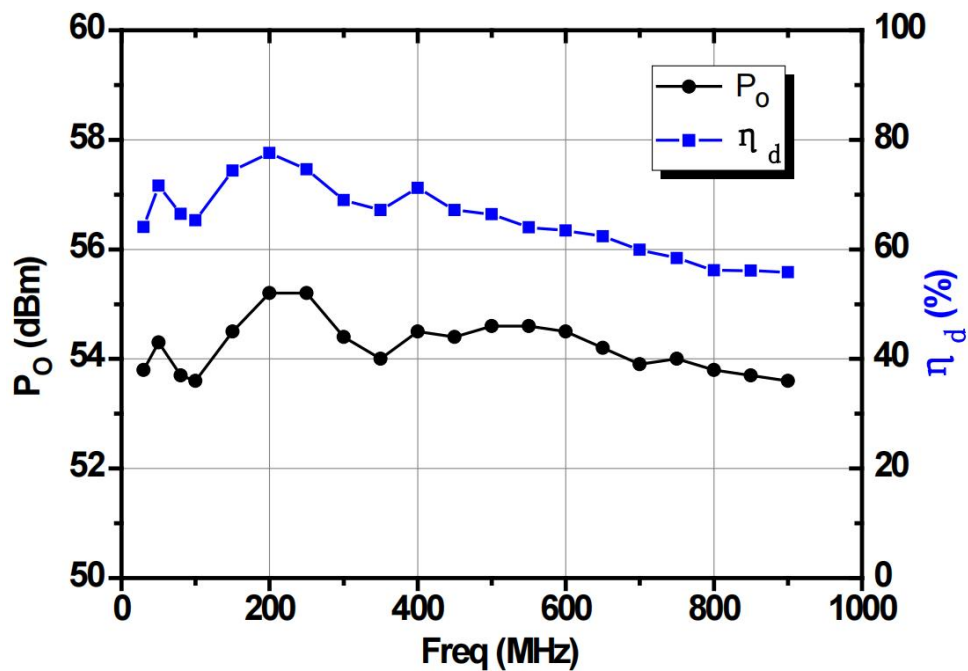


Absolute Max Ratings (T_A=25°C)

Symbol	Parameter	Value	Remark
V _d	Drain Voltage	50V	
V _g	Grid Voltage	-5V	
P _d	DC Dissipation	300W	25°C
T _{ch}	Channel Temperature	225°C	【1】
T _m	Mounting Temperature	300°C	1 min, N ₂ Protection
T _{stg}	Storage Temperature	-55~175°C	

【1】 Exceeding any one or combination of these limits may cause permanent damage.

Outline Drawing & Application Circuit

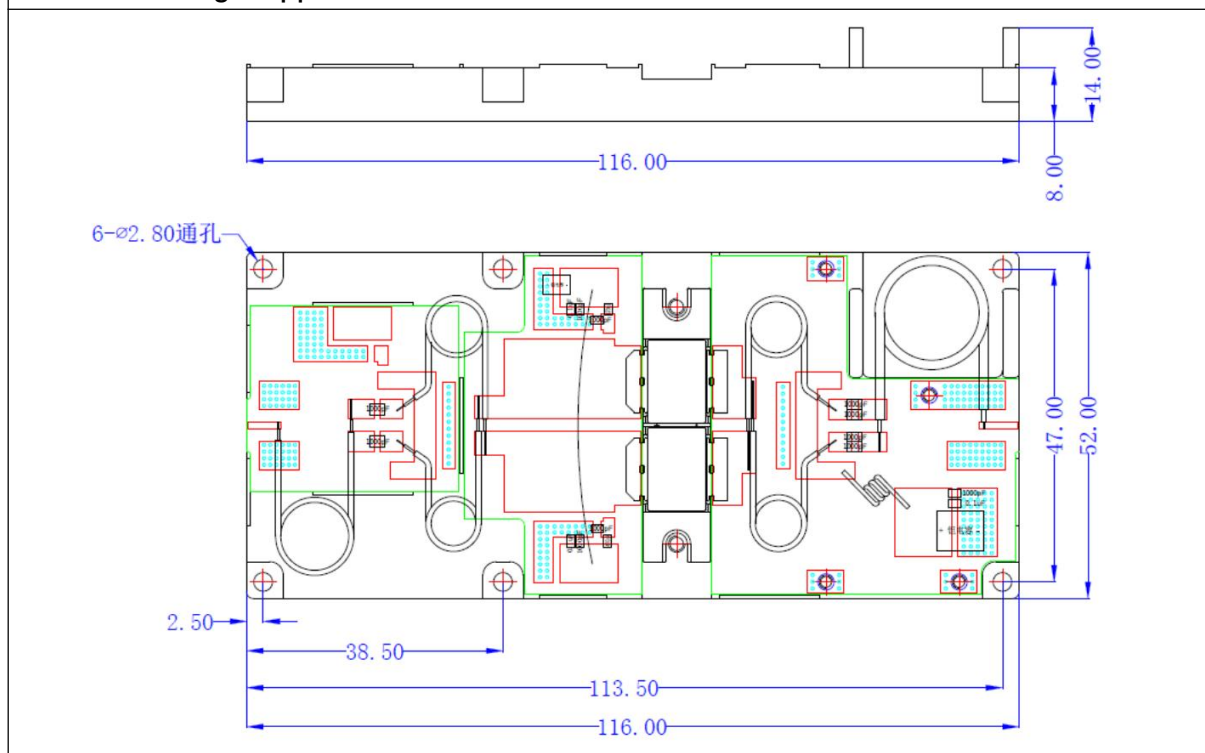

Note:

- (1) This product is a power module, and the input and output impedance values are both 50 ohms;
- (2) Please strictly follow the order of adding negative electricity first and then positive electricity in the power-on sequence. When de-energizing, first reduce the drain voltage and then reduce the gate voltage;
- (3) This product is a high-power device. It is necessary to pay attention to heat dissipation during use. The higher the case temperature, the shorter the service life. It is advisable to use the temperature not higher than 85 degrees;
- (4) This product is an electrostatic sensitive device, you need to pay attention to electrostatic protection during storage and use, and you need to be well grounded when using it;
- (5) The input terminal of this product needs to adopt radio frequency isolation measures.