

Performance


- Technology: 0.25um Power GaN HEMT
- Frequency: 0.8~2.0GHz
- Typical Pout : $\geq 49\text{dBm(CW)}$
- Typical Gain: $\geq 11\text{dB}$
- Typical PAE: $\geq 58\%$
- Bias: 28V/-2~-2.7V@1A
- Package: Carrier, non packaged



Electrical Specifications (TA=25°C,Vd=28V,Idq=1A,F: 0.8~2.0GHz,Pin=38dBm)

Symbol	Parameter	Min	Typical	Max	Unit
Pout	Output Power	49	-	-	dBm
Gp	Power Gain	11	-	-	dB
η_{add}	Power Added Efficiency	58	-	-	%
ΔG_p	Gain Flatness	-	-	± 0.7	dB
Rth	Thermal Resistance	-	0.95	-	°C/W

Test Curves

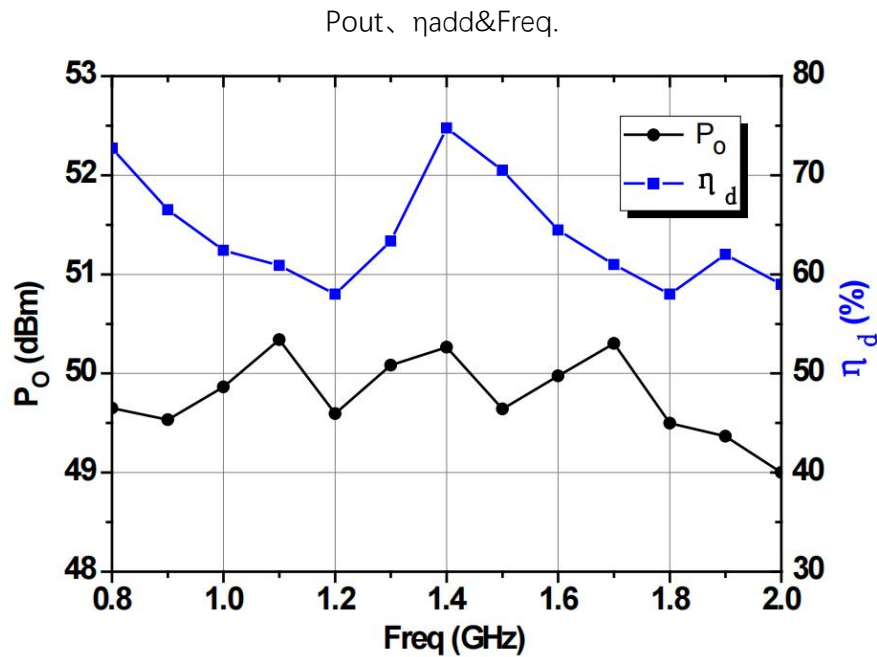


Absolute Max Ratings ($T_A=25^\circ\text{C}$)

Symbol	Parameter	Value	Remark
Vd	Drain Voltage	40V	
Vg	Grid Voltage	-5V	
Pd	DC Dissipation	250W	25°C
Tch	Channel Temperature	225°C	【1】
Tm	Mounting Temperature	300°C	1 min, N2 Protection
Tstg	Storage Temperature	-55~175°C	

【1】 Exceeding any one or combination of these limits may cause permanent damage.

Outline Drawing & Application Circuit

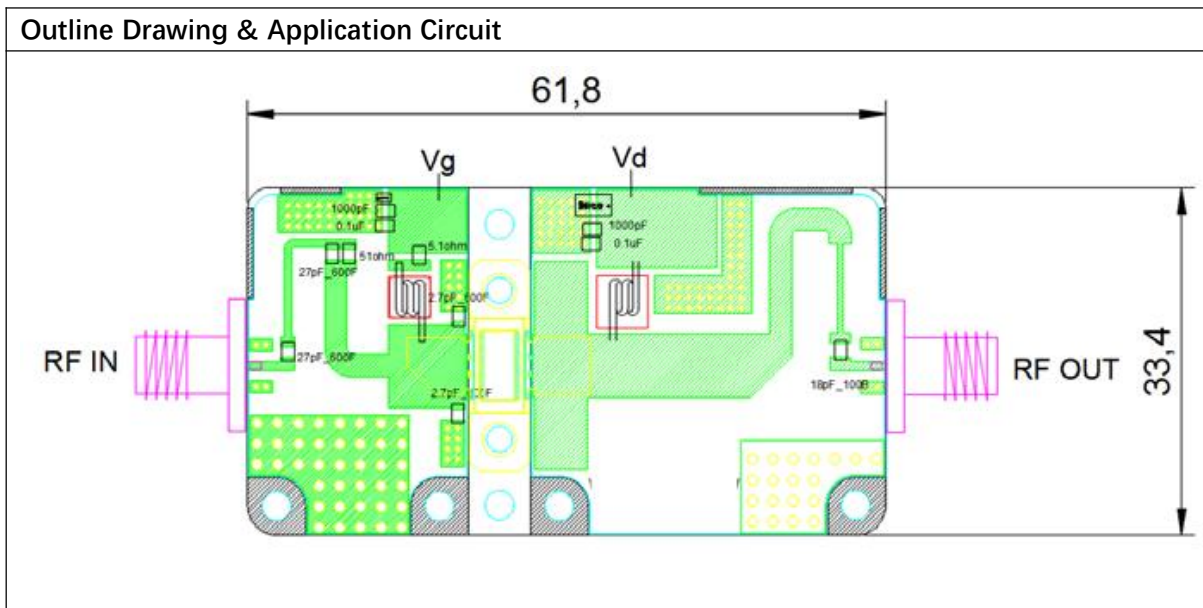

Note:

- (1) This product is an internal matching power amplifier module, and the input and output impedance values are both 50 ohms;
- (2) Please strictly follow the order of adding negative electricity first and then positive electricity in the power-on sequence. When de-energizing, first reduce the drain voltage and then reduce the gate voltage;
- (3) This product is a high-power device. It is necessary to pay attention to heat dissipation during use. The higher the case temperature, the shorter the service life. It is advisable to use the temperature not higher than 85 degrees;
- (4) This product is an electrostatic sensitive device. It is necessary to pay attention to electrostatic protection during storage and use, and it needs to be well grounded when using it;
- (5) The input standing wave is relatively high, and the input terminal needs to adopt radio frequency isolation measures, such as connecting an isolator.