



Features

- Ultra Wide Band
- Low Insertion Loss
- High Directivity
- Stable Performance
- Customization Available Upon Request

Applications

- Radar Systems
- Communication Systems
- Receivers Systems




Electrical Specifications (TA=25°C)

Parameter	Min.	Typ.	Max.	Unit
Frequency		1-40		GHz
Insertion Loss			1.9	dB
Normal Coupling		20		dB
Coupling Accuracy			±0.7	dB
Frequency Sensitivity			±1.0	dB
Directivity	10			dB
VSWR			1.7	-
Power Handling		20		W
Impedance	50			Ω
Input / Output Connectors	2.92mm-Female			
Material	Aluminum			
Weight	66g			
Package Sealing	Black Color (Standard)			

Environmental Specifications

Operating Temperature	-45 to +85°C
Storage Temperature	-55 to +125°C

Outline Drawing

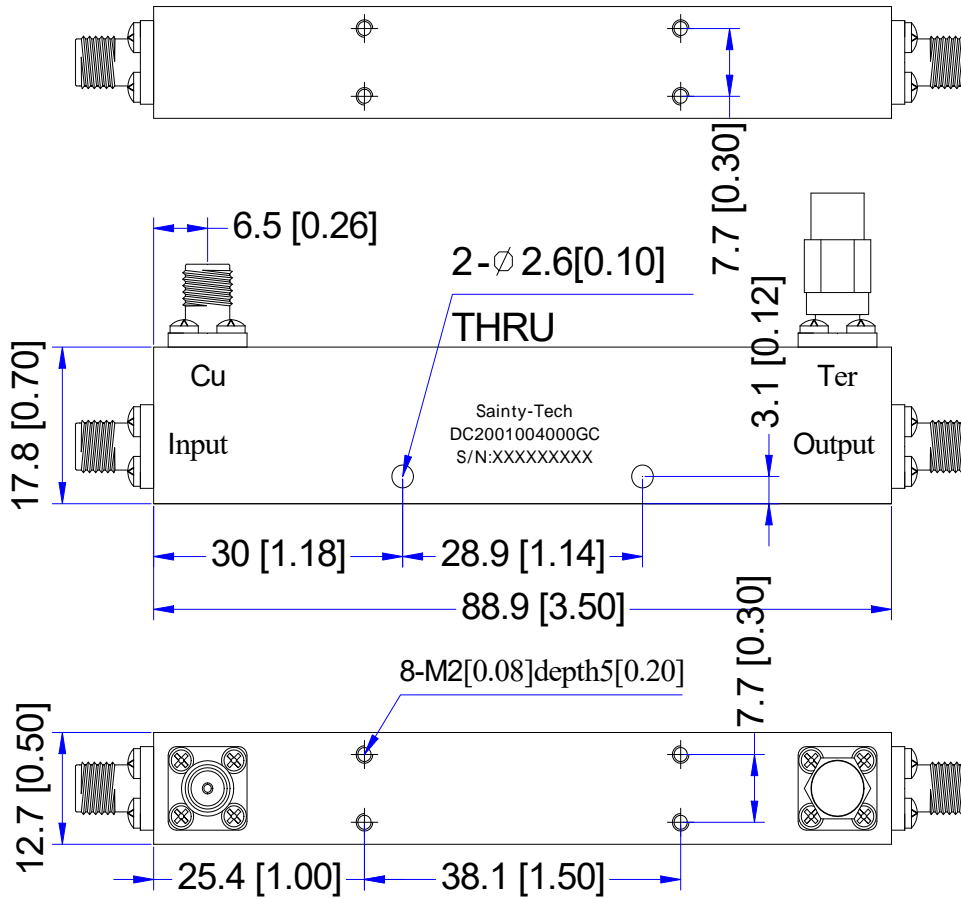

Unit: mm [inches]

Outline Tolerance: ± 0.25 [0.01]


Note

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Sainty-Tech Communications Limited reserves the right to change the above information without notice.




Test Curves


Insertion loss

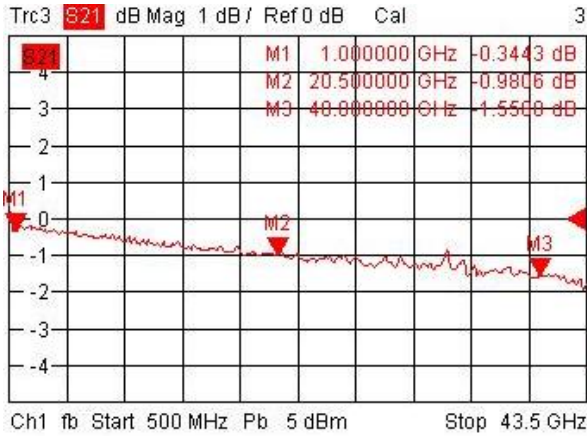


Coupling

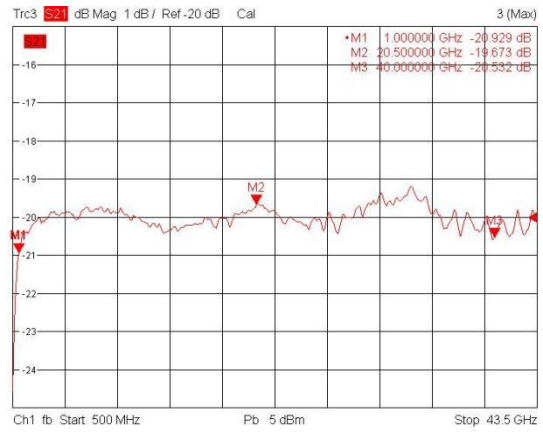

Input VSWR

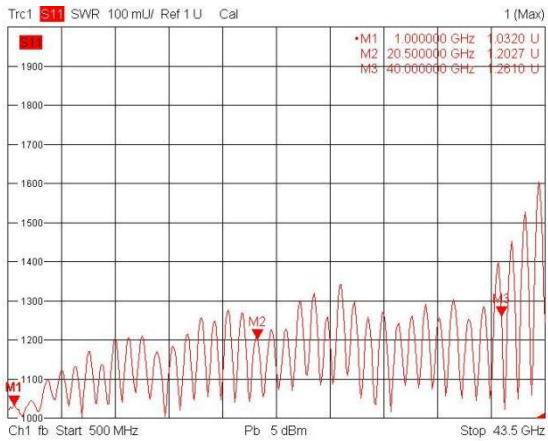

Output VSWR

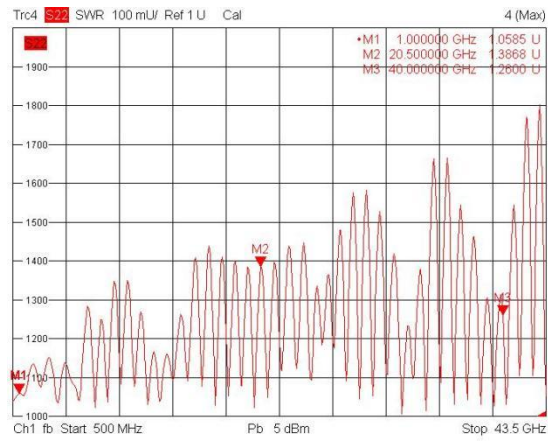

Directivity

