

**Features**

- Ultra Wide Band
- Low Insertion Loss
- High Directivity
- Stable Performance
- Customization Available Upon Request

**Applications**

- Radar Systems
- Communication Systems
- Receivers Systems




**Electrical Specifications (TA=25°C)**

Parameter	Min.	Typ.	Max.	Unit
Frequency		2-67		GHz
Insertion Loss		6.0	7.0	dB
Normal Coupling		13		dB
Coupling Accuracy		±1.0	±1.5	dB
Frequency Sensitivity		±1.0	±1.5	dB
Directivity	7	10		dB
VSWR		1.6	1.8	-
Power Handling		20		W
Impedance		50		Ω
Input / Output Connectors	1.85mm-Female			
Material	Aluminum			
Weight	-			
Package Sealing	Black Color (Standard)			

**Environmental Specifications**

Operating Temperature	-45 to +85°C
Storage Temperature	-55 to +125°C

Outline Drawing

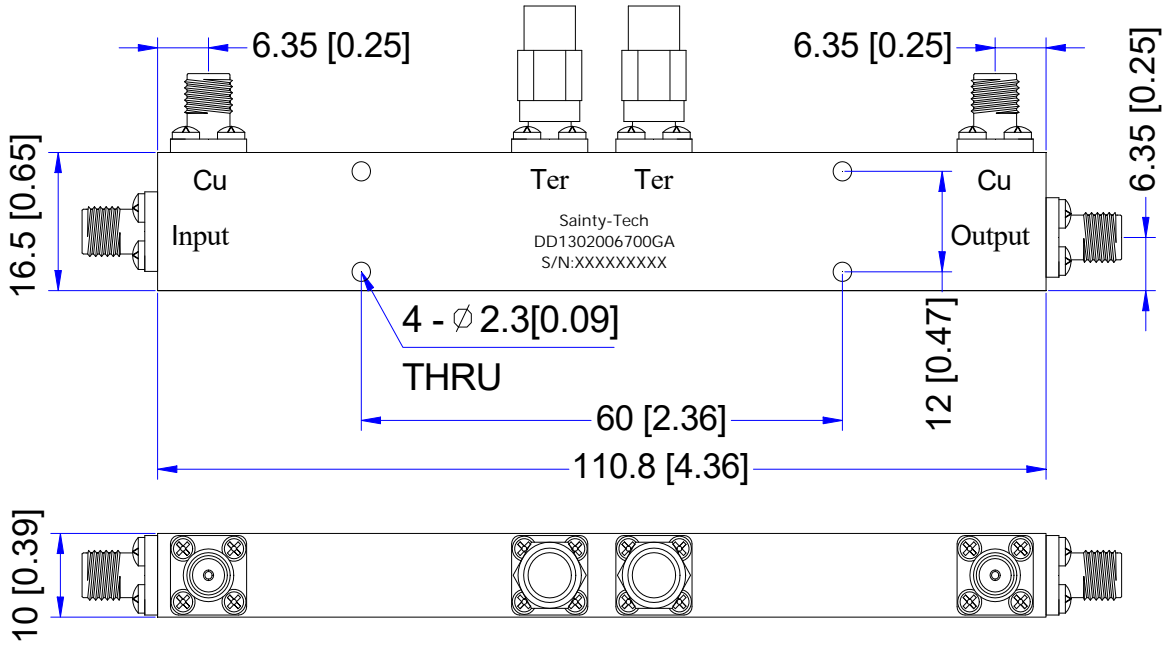

Unit: mm [inches]

Outline Tolerance:  $\pm 0.25 [0.01]$

**Note**

1. The product is designed to meet environmental ratings but not tested. If you need to test environmental condition, please contact our sales department.
2. Sainty-Tech Communications Limited reserves the right to change the above information without notice.