




扫码关注

NC5000A Series

18 GHz to 110 GHz

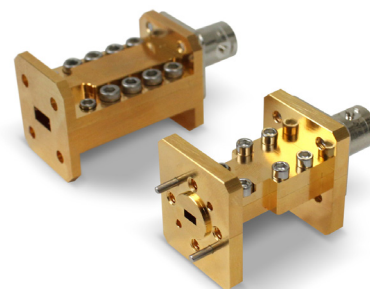

Precision Calibrated Millimeter-Wave Wave Guide AWGN Noise Sources

The NC5000A Series AWGN noise sources feature outstanding stability, switching speed, and ripple-free response over standard waveguide bands. The high stability of the NC5000A Series allows these units to be used in place of cumbersome gas tube noise sources.

Ripple in the output of noise sources has a direct effect on measurement accuracy, so Noisecom has tailored the response of the NC5000 Series so that ripple is minimized throughout the specified frequency range.

The standard input bias connector is BNC female.

Applications

- Noise figure measurement
- Radiometers
- Built-in test equipment (BITE)
- Military applications
- Automotive Radar
- 802.11ad, 60GHz Wi-Fi
- 60 GHz WiGig
- Small Cell Wireless Backhaul
- Wireless HD

Specifications


Noise output rise and fall times	Less than 1 μ s
Noise output variation with temperature	Less than 0.01 dB/ $^{\circ}$ C
Noise output variation with voltage	Less than 0.1 dB/1 % Δ V
Operating temperature	0 to +85 $^{\circ}$ C
Input power	+28 VDC at 30 mA max



Options



NC5opt01	+15 VDC
NC5opt04	+28 VDC with regulation Stabilized noise output for $\pm$ 2V variation
NC5opt05	Output isolator This option is standard on NC5115A, NC5112A, NC5110A

Model	Frequency Range (GHz)	Noise Output ENR (dB)	Flatness (dB)	Typical VSWR	Mating Flange	Calibration Frequencies	Waveguide	I (max) (mA)
NC5142A	18 - 26.5	15.5	±1.5	1.3:1*	UG595/U	1 GHz steps	WR42	30
NC5242A	18 - 26.5	25.0	±1.0	1.3:1*	UG595/U	1 GHz steps	WR42	30
NC5442A	18 - 26.5	6.0	±1.0	1.3:1*	UG595/U	1 GHz steps	WR42	30
NC5128A	26.5 - 40	15.5	±1.5	1.3:1*	UG599/U	1 GHz steps	WR28	30
NC5228A	26.5 - 40	23.0	±2.5	1.3:1*	UG599/U	1 GHz steps	WR28	30
NC5428A	26.5 - 40	6.0	±1.0	1.3:1*	UG599/U	1 GHz steps	WR28	30
NC5122A	33 - 50	15.5	±1.5	1.3:1*	UG383/U	1 GHz steps	WR22	30
NC5222A	33 - 50	21	±1.5	1.3:1*	UG599/U	1 GHz steps	WR22	30
NC5115A	50 - 75	15.5 TYP	±3.0	1.6:1*	UG385/U	1 GHz steps	WR15	30
NC5112A	60 - 90	15 TYP	±6.0	1.6:1	UG387/U	1 GHz steps	WR12	30
NC5110A	75 - 110	13 TYP	±5.0	1.6:1	UG387/U	1 GHz steps	WR10	30

*Maximum VSWR with isolator - Option 5

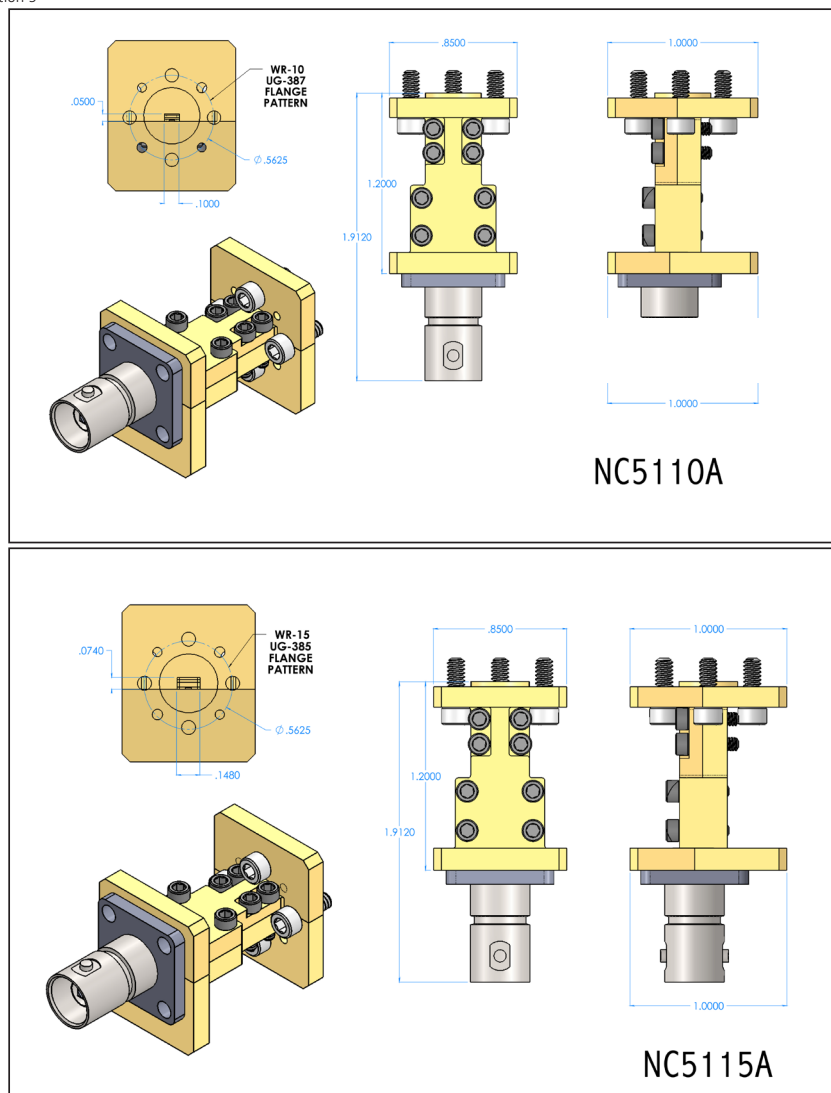

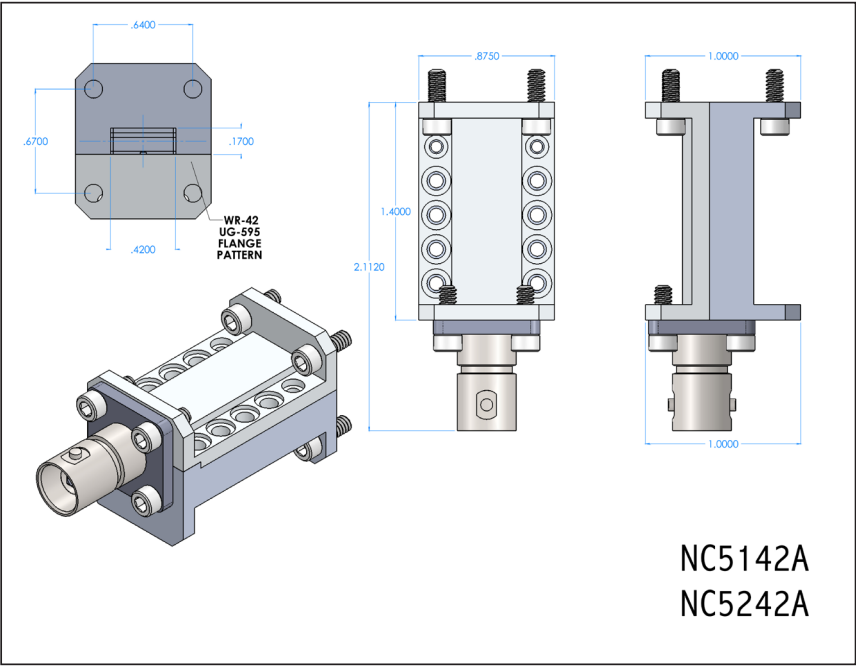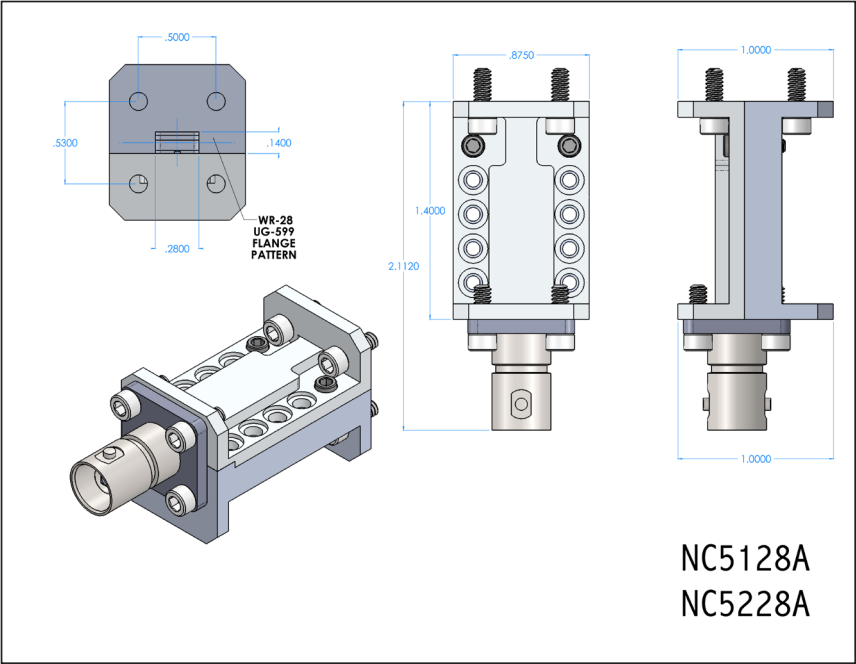

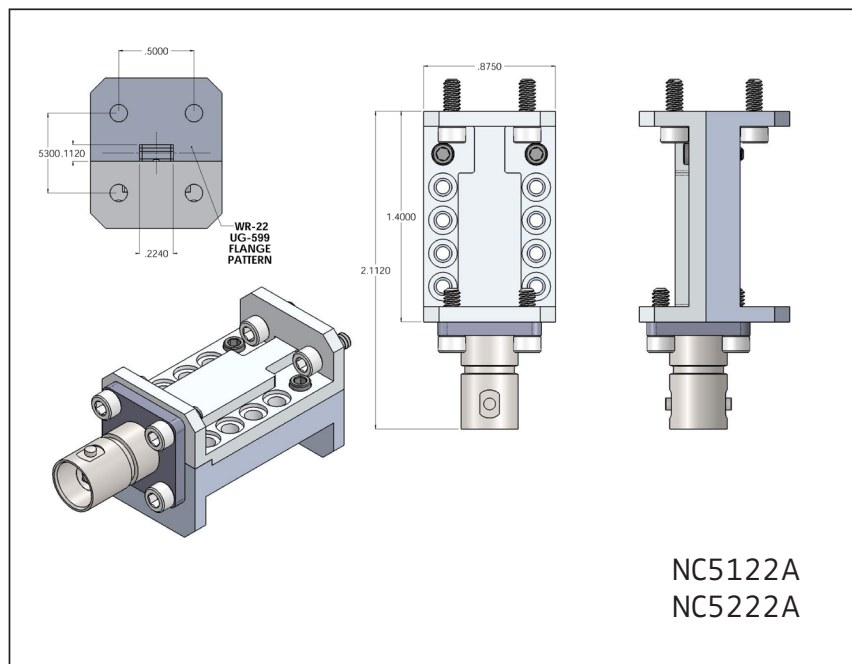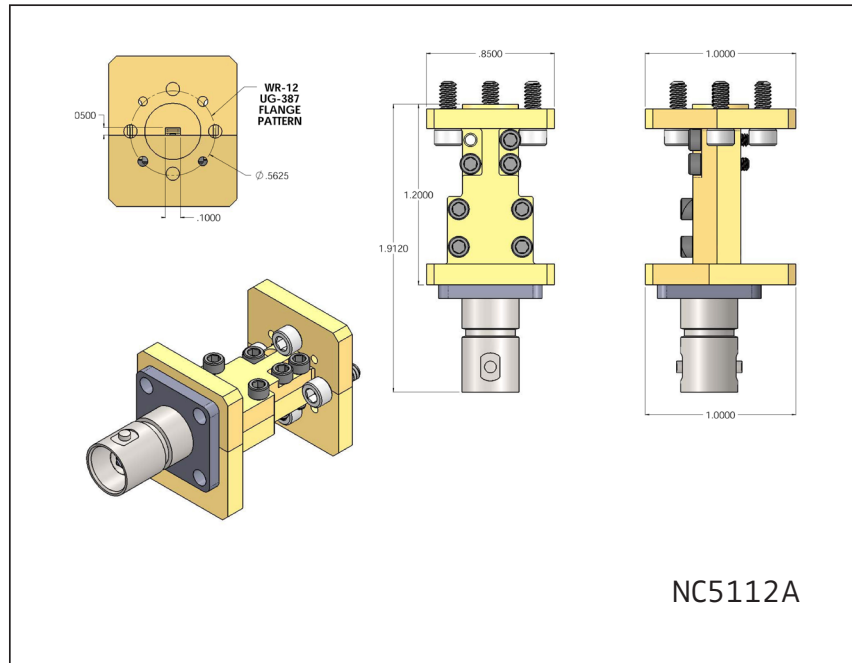

Wireless Telecom Group Inc.
25 Eastmans Rd
Parsippany, NJ
United States
Tel: +1 973 386 9696
Fax: +1 973 386 9191
noisecom.com

© Copyright 2019
All rights reserved.

N/NC5000A/0522/EN
Note: Specifications, terms and conditions
are subject to change without prior notice.



Noisecom是WTG (Wireless Telecom Group) 集团旗下全资子公司，总部坐落于新泽西州帕西帕尼，位于纽约市大都会区。

作为全球领先的射频、微波噪声源设计和制造商，其产品广泛应用于信号阻塞、加损、计量标校、抖动噪声加载、接收机性能等测试领域。

Noisecom拥有全球销售和服务办事处网络，致力于为用户提供卓越的产品服务和支持。

中国区(含香港)代理
南京舜特科通信技术有限公司

电话: 025-52635773

邮箱: sales@sainty-tech.com

网址: www.sainty-tech.com

www.noisecom.com

地址: 南京市江宁区胜利路89号紫金研创中心3号楼801