

HL9722 Differential Odd Mode Pencil Probe

The HL9722 is a handheld probe used to simplify the impedance characterization of IPC-2141A standard (0.100") PCB test coupons.

With its lightweight construction and differential SMA cabling, the HL9722 is designed specifically for use with the HL3204 Controlled Impedance Analyzer.



官方公众号 立即关注

Features and Technical Specifications

Measurement Type	Differential Odd Mode
Probe Footprint	0.100" square See Figure 2 at right
Rise Time (20-80%)	50 ps, typical
Insertion Delay	4.2 ns
Total Length	932.2 mm (36.7"), including SMA cables
Probe Handle Dimensions	121.4 x 10.9 mm 4.78" x 0.43"
Weight	45 g, 1.59 oz



Figure 1: HL9722 Differential Odd Mode Pencil Probe

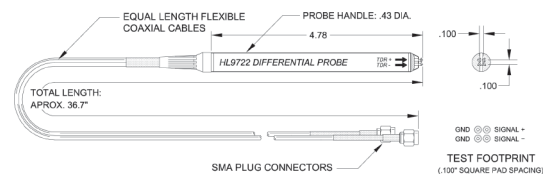


Figure 2: HL9722 dimensional drawing*

Deployment Notes and Recommendations

This probe has a pitch of 0.100" as per IPC-2141A standards. Upon request, a probe pitch of between 0.060" and 0.200" can be supplied.

The HL9722 is related to the HL9720 Differential Even Mode Pencil Probe and HL9721 Single-ended Pencil Probe.

These probes have been specifically designed for use with the HL3204 Controlled Impedance Analyzer from HYPERLABS.

We recommend that you consult with HYPERLABS prior to deployment with other test systems.

*A higher resolution version of the dimensional drawing above is available on our website.