

### Feature

- Precision MEMS process
- High performance, shielded, Micro-cavity structure
- Silicon substrate, 50Ω CPW output
- Au wire bonding, for MCM applications

### Environmental Specifications


Operating Temperature	-55°C~+85°C
Storage Temperature	-55°C~+125°C
Max. Input Power	35dBm

### Electrical Specifications(T<sub>A</sub>=+25°C)

Parameter	Min.	Typ.	Max.	Unit
Center Freq. (f <sub>0</sub> )	-	6.9	-	GHz
Pass Band	5.5	-	8.3	GHz
Ripple in Pass band	-	-	1	dB
Insertion Loss @ f <sub>0</sub>	-	-	1.5	dB
Return Loss	15	-	-	dB
Out of band Attenuation	≥ 30@4.4GHz&9.5GHz			dB
	≥ 40@3.5GHz&10.3GHz			dB
Attenuation	≥ 60@DC~2.6GHz			dB
	≥ 50@10.5~16.5GHz			dB
Group Delay Variation	≤ 0.6@5.5~8.3GHz			ns
Linear Phase	≤ ±10@5.5~8.3GHz			°

S2P file name: SiMF6R9\_2R8-6D1.s2p


### Outline Drawing

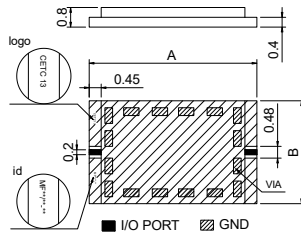


Symbol	Value (mm)		
	Min.	Nominal	Max.
A	5.9	-	6.0
B	3.9	-	4.0

### Typical Test Curves


Insertion Loss VS Frequency (T<sub>A</sub>=25°C)

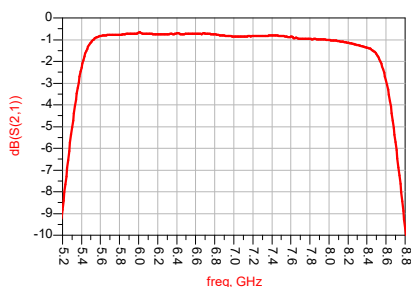


Insertion Loss & Return Loss VS Frequency (T<sub>A</sub>=25°C)

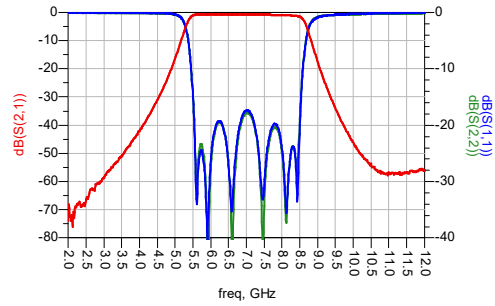

Broadband Insertion Loss VS Frequency (T<sub>A</sub>=25°C)

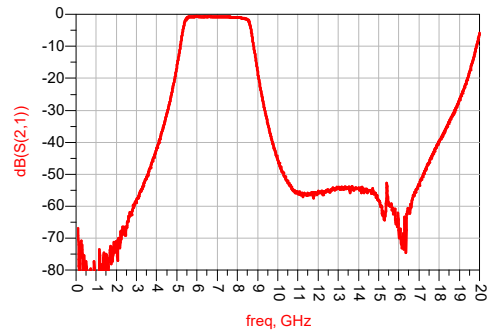


### Recommended Assembly Diagrams

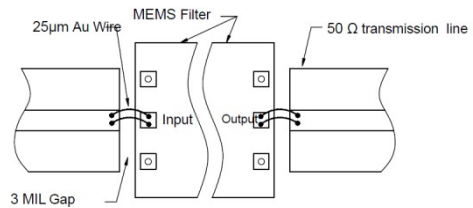

### Application Notes:

1. The chip is back-metallized and can be die mounted with AuSn eutectic performs or with electrically conductive epoxy (for example ME8456).
2. The die should be assembled on carriers like Kovar or Mu-Cu which have same Coefficient of thermal expansion. (2.9ppm/°C) with Silicon, thickness 0.2mm max.
3. Handle the chips in a clean environment. DO NOT attempt to clean the chip using liquid cleaning systems.
4. Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers.
5. Recommended to use T structure as below for bonding.

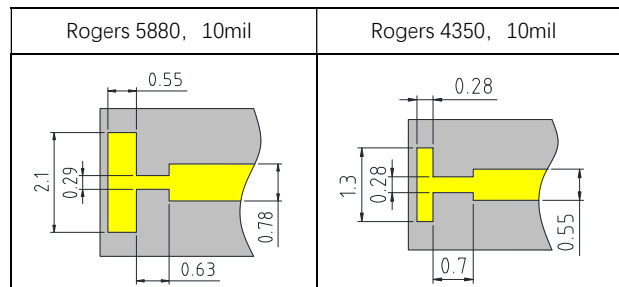

6. If you have any questions, please contact us.