

## Features

Ultra Wide Band

Low Insertion Loss

High Isolation

Rush Delivery

Fast Response

Customization Available Upon Request


## Electrical Specifications

Parameter		Min.	Typ.	Max.	Unit
Frequency		0.7	-	2.7	GHz
Insertion Loss		-	-	0.4	dB
Isolation		20	-	-	dB
Input VSWR		-	-	1.25	--
Output VSWR		-	-	1.2	--
Amplitude Umbalance		-	-	±0.3	dB
Phase Umbalance		-	-	±3	deg
Power Rating	Forward Power	30			W
	Reverse Power	2			W
Impedance		50			Ohms
Weight		/			Ounce
Input / Output Connectors		N-FEMALE			
Finish		Passivated aluminum			

## Environmental Specifications

Operating Temperature	-30 to +70°C
Storage Temperature	-45 to +105°C
Altitude	30,000ft (Epoxy Sealed Controlled environment)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C 95% RH at 40°C
Shock	20G for 11msec half sinewave, 3 axis both directions

**Outline Drawing**

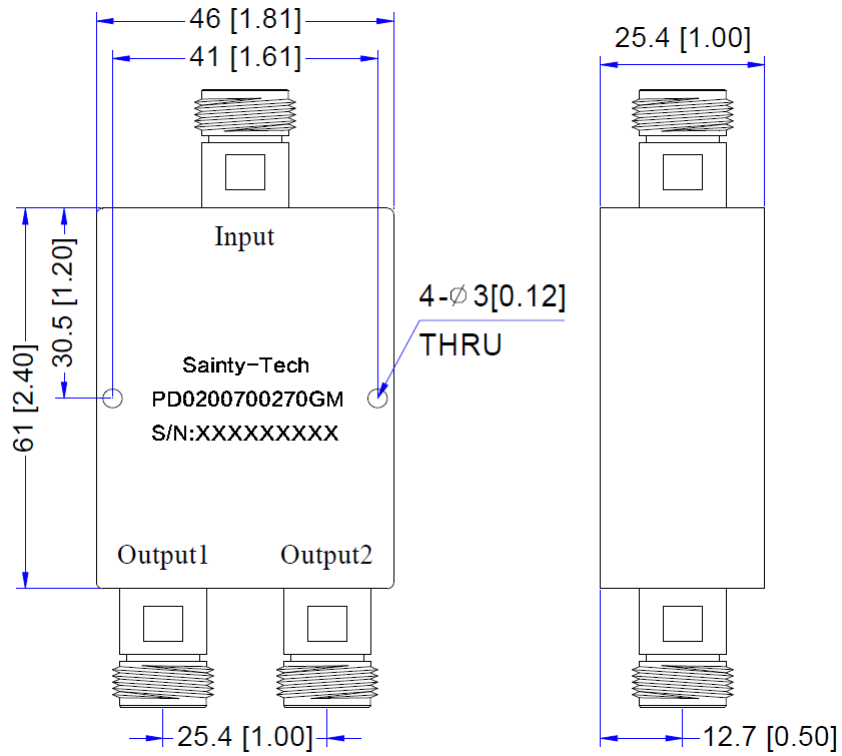

Unit: mm [inches]

Outline tolerance:  $\pm 0.2$ [0.008]