

Features

SAW filter for WIFI

- High stability and reliability with good performance
- Single ended to Single ended
- Narrow and sharp pass band characteristics. RoHS compatible
- Low insertion loss and deep stop band attenuation for interference
- Package size 1.1mm*0.9mm


Electrical Specification

ITEM		Min.	Typ.	Max.	Unit	Note
Frequency range		2402.5		2481.5	MHz	
Insertion Loss	2402.5~2481.5 MHz		1.6	3.0	dB	-30~85°C, Averaged for any 19MHz BW over frequency range
Passband Ripple@20MHz	2402.5~2481.5MHz			2.5	dB	-30~85°C, Averaged for any 19MHz BW over frequency range
VSWR @Input port	2402.5~2481.5MHz			2.3		-30~85°C, Averaged for any 19MHz BW over frequency range
VSWR @Output port	2402.5~2481.5MHz			2.3		-30~85°C, Averaged for any 19MHz BW over frequency range
VSWR @Rx port	2402.5~2481.5MHz			2.5		RT(25°C)
VSWR @Ant port	2402.5~2481.5MHz			2.5		RT(25°C)
Attenuation	699M~960 MHz	29	37		dB	
Attenuation	1425M~2170MHz	27	35		dB	
Attenuation	2300M~2370MHz	30	45		dB	Averaged for any 5 MHz BW
Attenuation	2370M~2380MHz	15	48		dB	Averaged for any 5 MHz BW
Attenuation	2496M~2500MHz	7	39		dB	Averaged for any 5 MHz BW
Attenuation	2500~2505MHz	15	45		dB	Averaged for any 5 MHz BW
Attenuation	2505~2570MHz	30	45		dB	Averaged for any 5 MHz BW
Attenuation	2570~2620MHz	30	45		dB	Averaged for any 5 MHz BW
Attenuation	2620~2690MHz	30	45		dB	Averaged for any 5 MHz BW
Attenuation	4900M~5805MHz	25	35		dB	
Attenuation	7200M~7500MHz	19	30		dB	
Input / Output Impedance (Nominal)		50Ω/50Ω				

Maximum Ratings

Rating	Symbol	Value	Unit
Input RF Power (Tx port: 2402.5-2481.5MHz)	P	24dBm,CW,3000h,50°C	
Input RF Power (Other Frequency without 2402.5-2481.5MHz)	P	10dBm,CW, 3000h,50°C	
Input RF Power (Ant port: 2402.5-2481.5MHz)	P	15dBm,CW, 3000h,50°C	
Input RF Power (Other Frequency without 2402.5-2481.5MHz)	P	10dBm,CW, 3000h,50°C	
Operating Temperature Range	T _A	-30 ~ +85	°C
Storage Temperature Range	T _{stg}	-40 ~ +85	°C
ESD Voltage (HBM)	V _{ESD}	> 100	V
ESD Voltage (CDM)	V _{ESD}	> 100	V
Moisture Sensitivity Levels	MSL	3	

Outline Drawing

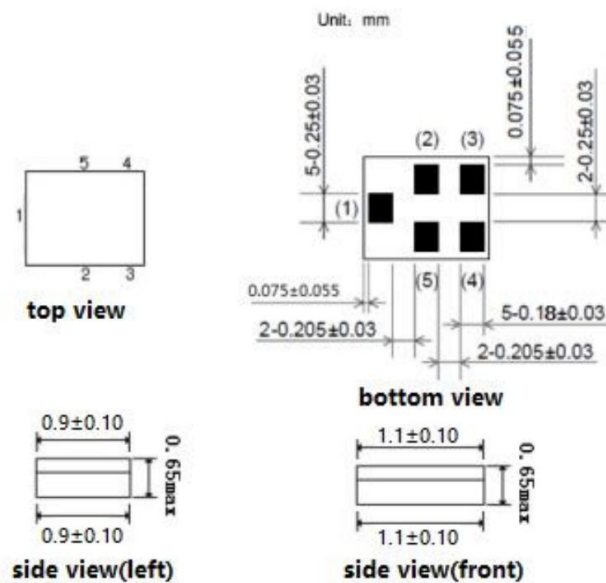


Pin Configuration

PIN#	Description
1	Input
4	Output
2,3,5	Ground



Marking

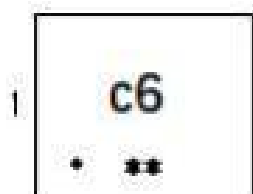

Top View, Laser Marking

“c6”: Part Number
“.” Dot marking, indicates input

“1”: Terminal 1


The first “*”: Month Code (The code shown below varies in a 4-year-cycle)


Month	1	2	3	4	5	6	7	8	9	10	11	12
2016/2020	n	p	q	r	s	t	u	v	w	x	y	z
2017/2021	A	B	C	D	E	F	G	H	J	K	L	M
2018/2022	N	P	Q	R	S	T	U	V	W	X	Y	Z
2019/2023	a	b	c	d	e	f	g	h	i	j	k	m

The second “*”: Date Code


Date	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	
Code	A	B	C	D	E	F	G	H	J	K	
Date	11th	12th	13th	14th	15th	16th	17th	18th	19th	20th	
Code	L	M	N	P	Q	R	S	T	U	V	
Date	21st	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31st
Code	W	X	Y	Z	a	b	d	e	f	g	h

Typical Frequency Response

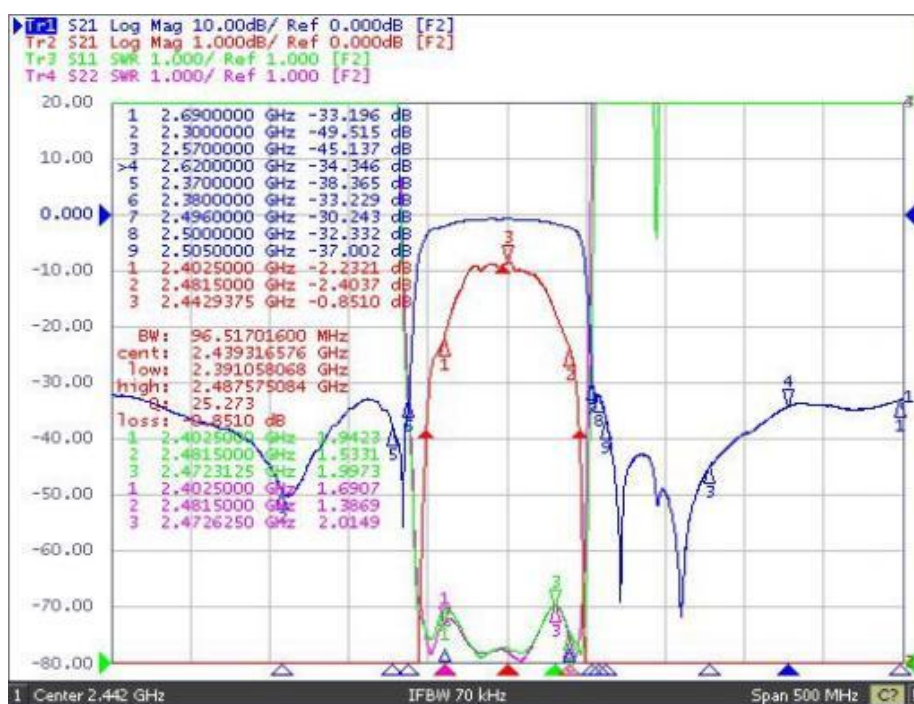

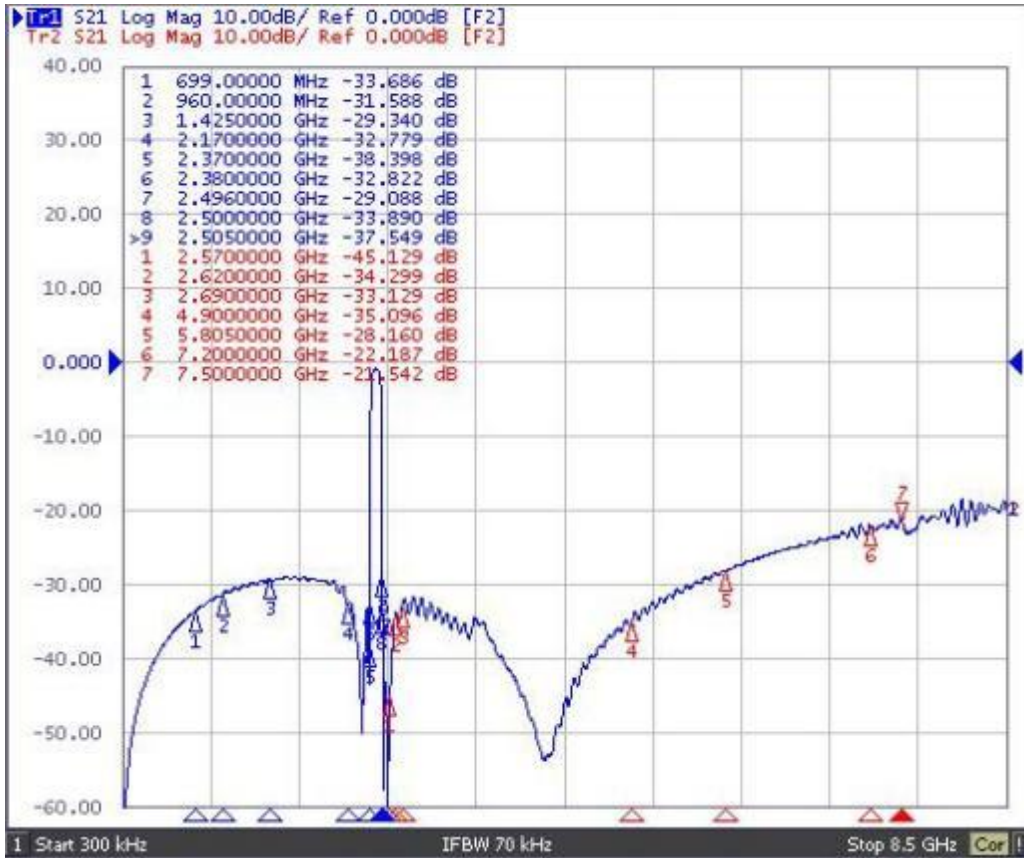

Test Circuit

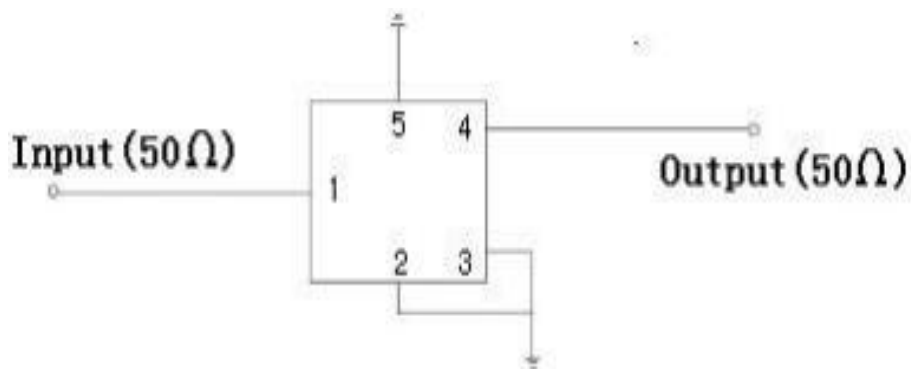

Stability Characteristics


ITEM	Test Item	STD Reference	Test Conditions	per lot
	Preconditioning	JESD22-A113	1) Temperature Cycling, 5 cycles -40°C to 85°C; 2) Bake, 24 hrs @85±5°C; 3)Moisture Soak, Soak time and conditions per IPC/JEDEC J-STD-020 based on device MSL level; 4) Reflow, 3 reflow cycles; 5) Drying, Room ambient temperature.	All behind
1	Temperature Cycling	JESD22-A104	-40°C / +85°C ,5°C/min, 15min dwell, < 1 min transfer time,500cycles	3*25 pcs
2	High Temperature Storage	JESD22-A103	Temperature = 85°C, 1000 hours.	3*25 pcs
3	Temperature Humidity no bias	JEDEC Std A101-B	85°C 85%RH 240 hours	3*25 pcs
4	Human Body Mode ESD	JESD22-A114	Ta=25°C, ≥100V	3 pcs
5	Charge Device Mode ESD	JESD22-C101	Ta=25°C, ≥100V	3 pcs
6	Solderability	JESD22-B102	Wetting: 245°C, 5s.	22 pcs
7	Drop Test	JESD22-B111	1500 Gs, 0.5 millisecond duration, half-sine pulse.	20 pcs
8	Mechanical Shock	JESD-47	Shock pulse of 1500g with pulse duration of 0.5+/-0. 1msec (X ,Y & Z); 5 shocks per axis.	3*25 pcs

Remarks


- SAW devices should not be used in any type of fluid such as water, oil, organic solvent, etc.
- Be certain not to apply voltage exceeding the rated voltage of components.
- Do not operate outside the recommended operating temperature range of components.
- Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- Be careful of soldering temperature and duration of components when soldering.
- Do not place soldering iron on the body of components.
- Be careful not to subject the terminals or leads of components to excessive force.
- SAW devices are electrostatic sensitive. Please avoid static voltage during operation and storage.
- Ultrasonic cleaning shall be avoided. Ultrasonic vibration may cause destruction of components.

Packing Information

Carrier Tape

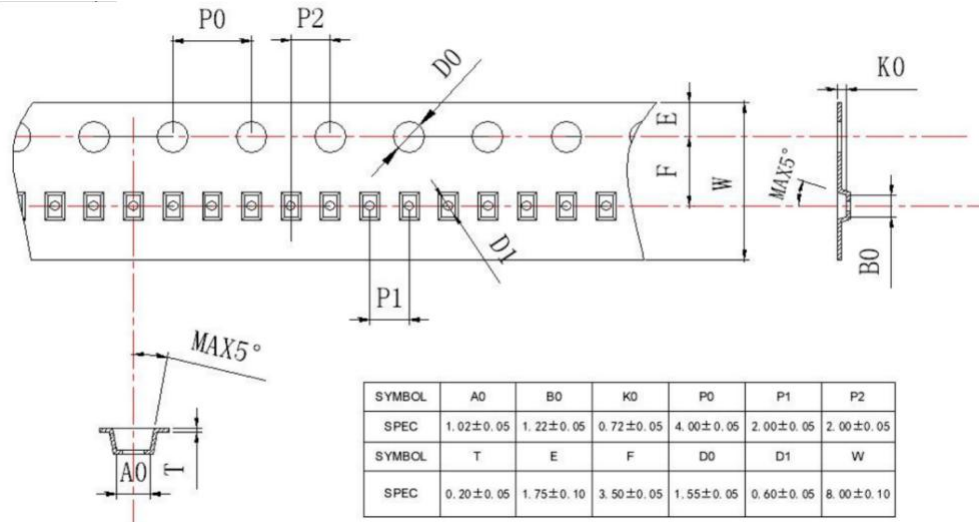


Reel Dimensions

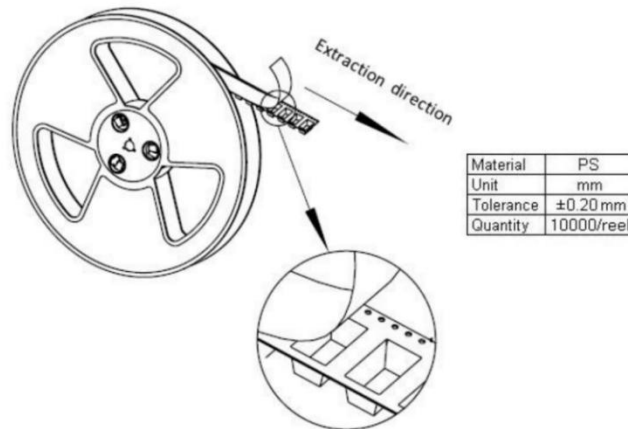

Outer Packing

Type	Quantity	Dimension	Description	Weight
Carton Box I	100000	240×210×285mm	anti-static plastic bag & carton box 1 reel / bag 10 bags / box (100000pcs)	2.15kg
Carton Box II	300000	470×310×285mm	30 bags / box (300000pcs)	6.22kg

Recommended Soldering Profile

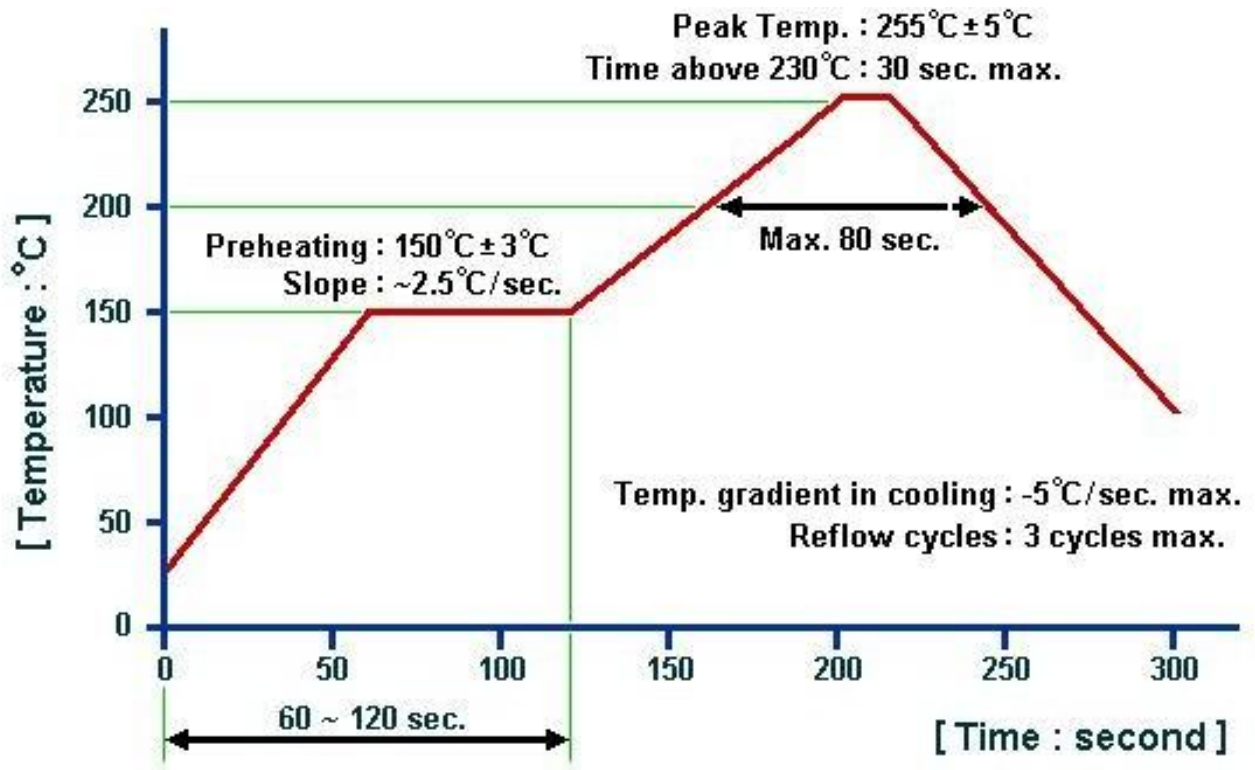

Remarks:

1. The specifications of this device are subject to change or obsolescence without notice.
2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
4. For questions on technology, prices and delivery, please contact our sales offices or e-mail sales@sainty-tech.com.