

Performance

- Technology: 0.35um Power GaN HEMT
- Frequency: 3.7~4.2GHz
- Typical Pout : 50dBm(CW)
- Typical Gain: 11dB
- Typical PAE: 60%
- Bias: 28V/-4~-2V
- Impedance: 50Ω
- Package: Metal Ceramic




Electrical Specifications (TA=25°C,Vd=28V,Vg=-4~-2V,Id≈6A,F: 3.7~4.2GHz)


Symbol	Parameter	Min	Typical	Max	Unit
Pout	Output Power	-	50	-	dBm
Gp	Power Gain	-	11	-	dB
η_{add}	Power Added Efficiency	-	60	-	%
ΔGp	Gain Flatness	-0.8	-	+0.8	dB
Rth	Thermal Resistance	-	-	1.2	°C/W

Test Curves

Pout&Freq. @ Different Temp.

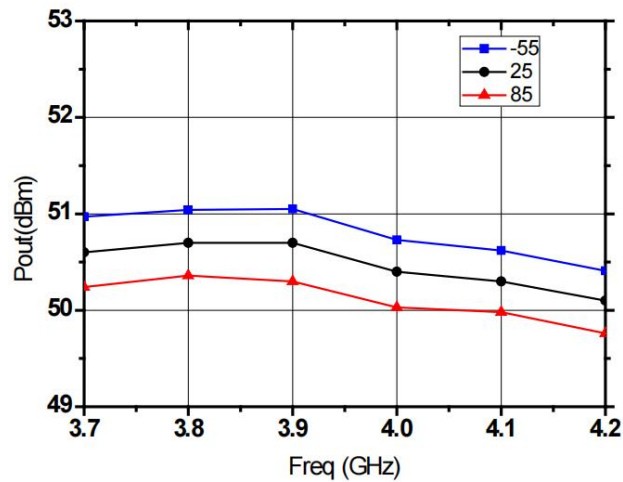


PAE&Freq. @ Different Temp.

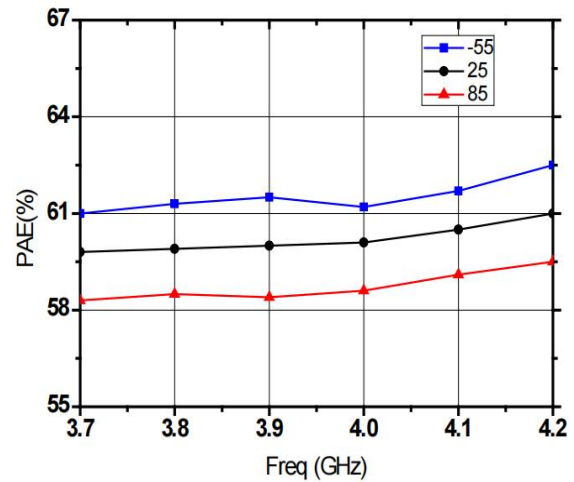

Absolute Max Ratings (T_A=25°C)


Symbol	Parameter	Value	Remark
V _d	Drain Voltage	40V	
V _g	Grid Voltage	-5V	
T _{ch}	Channel Temperature	175°C	【1】
T _m	Mounting Temperature	300°C	1 min, N ₂ Protection
T _{stg}	Storage Temperature	-55~175°C	

【1】 Exceeding any one or combination of these limits may cause permanent damage.

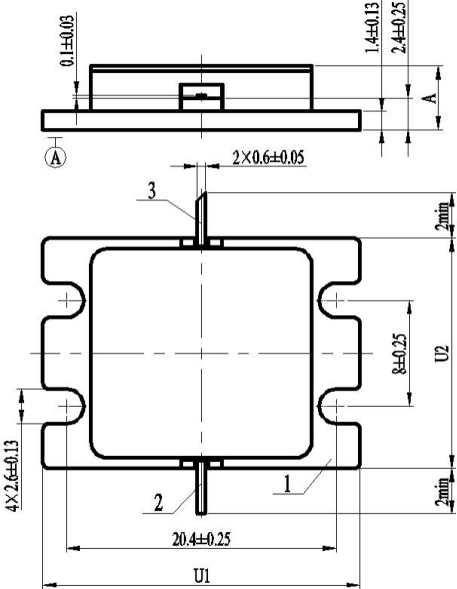Outline Drawing	Dimension Symbol														
 The drawing shows the physical dimensions of the transistor. The top view is a square with rounded corners, with overall width U1 and height U2. The side view shows the mounting structure with dimensions A, 1.4±0.13, 2.4±0.25, and 0.1±0.03. Other dimensions include 2×0.6±0.05, 20.4±0.25, 8±0.25, 4×2.6±0.13, and 2min.	<table> <tr> <th rowspan="2">Symbol</th><th colspan="2">Value (unit: mm)</th></tr> <tr> <th>Min.</th><th>Max.</th></tr> <tr> <td>U1</td><td>23.80</td><td>24.20</td></tr> <tr> <td>U2</td><td>17.20</td><td>17.60</td></tr> <tr> <td>A</td><td>-</td><td>5.2</td></tr> </table>	Symbol	Value (unit: mm)		Min.	Max.	U1	23.80	24.20	U2	17.20	17.60	A	-	5.2
Symbol	Value (unit: mm)														
	Min.	Max.													
U1	23.80	24.20													
U2	17.20	17.60													
A	-	5.2													

Application Circuit

Parameter	Symbol	Value	Unit
Filter capacitor	C1,C2,C4, C5,C6	1000	pF
Filter capacitor	C3,C7	100	pF
DC isolation capacitance	C8,C9	20	pF
Stabilizing resistance	R1	15	Ω
Resistance	R2	50	Ω
Microstrip line	TL1,TL2	λ/4	-

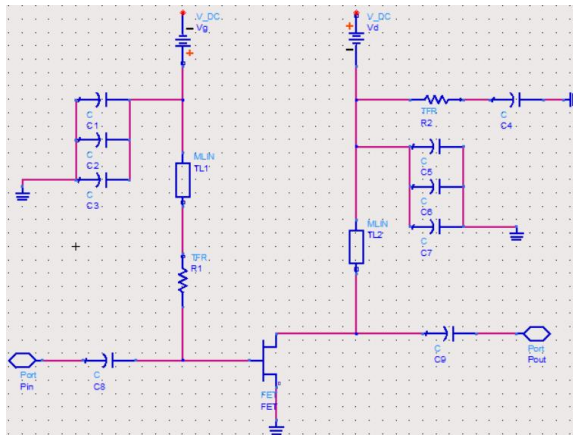

Note:

- (1) This product is an internal matching tube, with input and output impedance values of 50 ohms;
- (2) The power-on sequence shall be in strict accordance with the sequence of applying negative power first and then positive power. When power-off, the leakage voltage shall be reduced first and then the grid voltage shall be reduced;
- (3) This product is a high-power device. Pay attention to heat dissipation during use. The higher the shell temperature is, the shorter the service life is. The service temperature should not be higher than 80 °C;
- (4) This product is an electrostatic sensitive device. It needs to pay attention to electrostatic protection during storage and use, and it needs to be grounded well during use.