

Performance

- Technology: 0.25um Power GaN HEMT
- Frequency: 8.5~9.6GHz
- Typical Pout : 53dBm
- Typical Gain: 8dB
- Typical PAE: 40%
- Bias: 28V/-2.4V@6.5A
- Package: Metal Ceramic




Electrical Specifications ($T_A=25^{\circ}\text{C}$, $V_d=28\text{V}$, $V_g=-2.4\text{V}$, $I_d\approx 6.5\text{A}$, $F: 8.5\sim 10\text{GHz}$, $PL=1\text{ms}$, $D.C=10\%$)


Symbol	Parameter	Min	Typical	Max	Unit
Pout	Output Power	-	50	-	dBm
Gp	Power Gain	-	8	-	dB
η_{add}	Power Added Efficiency	-	40	-	%
Rth	Thermal Resistance	-	-	-	$^{\circ}\text{C}/\text{W}$
ΔG_p	Gain Flatness	-0.8	-	+0.8	dB

Test Curves

Pout&Freq. @ Different Temp.

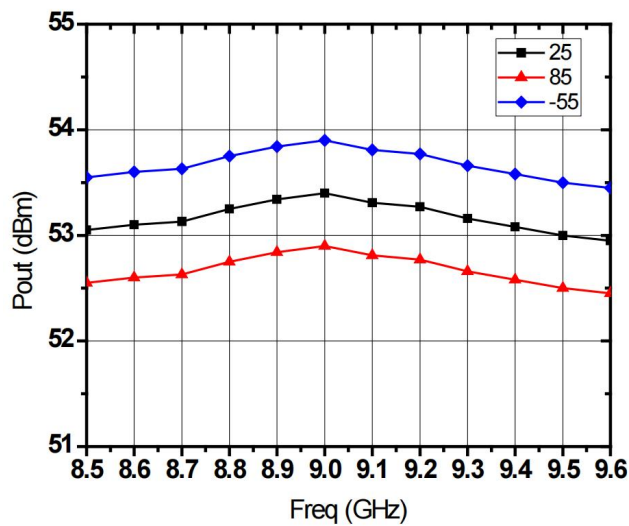


PAE&Freq. @ Different Temp.

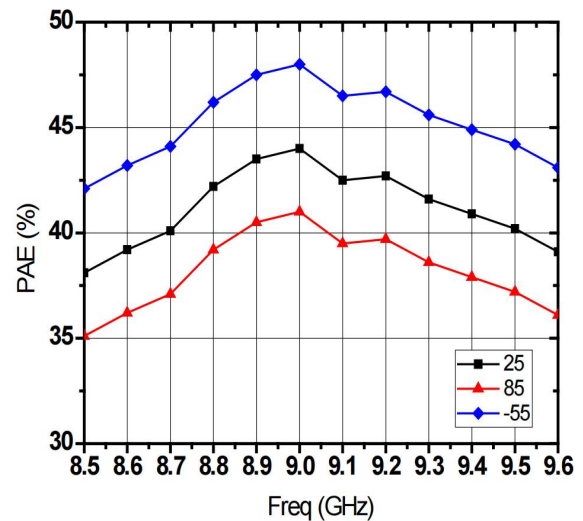

Absolute Max Ratings (T_A=25°C)

Symbol	Parameter	Value	Remark
V _d	Drain Voltage	80V	
V _g	Grid Voltage	-5V	
P _d	DC Dissipation	400W	25°C
T _{ch}	Channel Temperature	225°C	【1】
T _m	Mounting Temperature	300°C	1 min, N ₂ Protection
T _{stg}	Storage Temperature	-55~175°C	

【1】 Exceeding any one or combination of these limits may cause permanent damage.

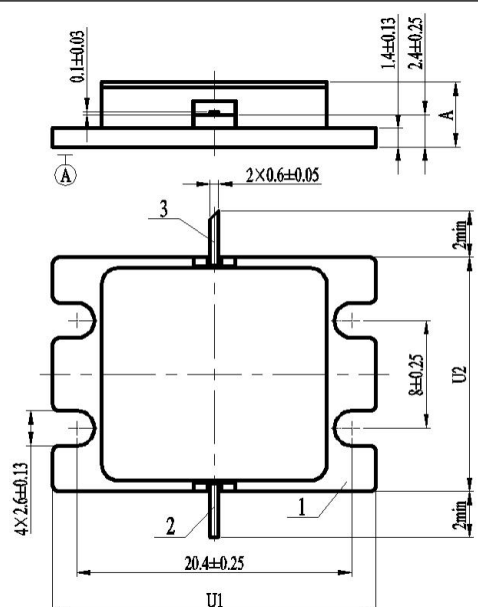Outline Drawing	Dimension Symbol														
 The drawing consists of two views: a top view and a side view. The top view shows a square-like component with rounded corners and four protruding pads. Dimensions include: overall width U1 = 20.4±0.25, overall height U2 = 8±0.25, pad width 4×2.6±0.13, pad spacing 2×0.6±0.05, and a central feature with a height of 2min. The side view shows the component's profile with a total height of A, a top layer thickness of 0.1±0.03, and a base layer thickness of 1.4±0.13. A dimension of 2.4±0.25 is also indicated for the base layer.	<table><tr><th rowspan="2">Symbol</th><th colspan="2">Value (unit: mm)</th></tr><tr><th>Min.</th><th>Max.</th></tr><tr><td>U1</td><td>23.80</td><td>24.20</td></tr><tr><td>U2</td><td>17.20</td><td>17.60</td></tr><tr><td>A</td><td>-</td><td>5.2</td></tr></table>	Symbol	Value (unit: mm)		Min.	Max.	U1	23.80	24.20	U2	17.20	17.60	A	-	5.2
Symbol	Value (unit: mm)														
	Min.	Max.													
U1	23.80	24.20													
U2	17.20	17.60													
A	-	5.2													

Application Circuit	Pad Definition																												
	<table><tr><th>Parameter</th><th>Symbol</th><th>Value</th><th>Unit</th></tr><tr><td>Filter capacitor</td><td>C1,C2,C4, C5,C6</td><td>1000</td><td>pF</td></tr><tr><td>Filter capacitor</td><td>C3,C7</td><td>100</td><td>pF</td></tr><tr><td>DC isolation capacitance</td><td>C8,C9</td><td>1</td><td>pF</td></tr><tr><td>Stabilizing resistance</td><td>R1</td><td>15</td><td>Ω</td></tr><tr><td>Resistance</td><td>R2</td><td>50</td><td>Ω</td></tr><tr><td>Microstrip line</td><td>TL1,TL2</td><td>$\lambda/4$</td><td>-</td></tr></table>	Parameter	Symbol	Value	Unit	Filter capacitor	C1,C2,C4, C5,C6	1000	pF	Filter capacitor	C3,C7	100	pF	DC isolation capacitance	C8,C9	1	pF	Stabilizing resistance	R1	15	Ω	Resistance	R2	50	Ω	Microstrip line	TL1,TL2	$\lambda/4$	-
Parameter	Symbol	Value	Unit																										
Filter capacitor	C1,C2,C4, C5,C6	1000	pF																										
Filter capacitor	C3,C7	100	pF																										
DC isolation capacitance	C8,C9	1	pF																										
Stabilizing resistance	R1	15	Ω																										
Resistance	R2	50	Ω																										
Microstrip line	TL1,TL2	$\lambda/4$	-																										

Note:

- (1) This product is an internal matching tube, and the input and output impedance values are both 50 ohms;
- (2) Please strictly follow the order of adding negative electricity first and then positive electricity in the power-on sequence. When de-energizing, first reduce the drain voltage and then reduce the gate voltage;
- (3) This product is a high-power device. It is necessary to pay attention to heat dissipation during use. The higher the case temperature, the shorter the service life. It is advisable to use the temperature not higher than 80 degrees;
- (4) This product is an electrostatic sensitive device. It is necessary to pay attention to electrostatic protection during storage and use, and it needs to be well grounded when using it.